





For more Hi-Fi manuals and set-up information
please visit www.hifiengine.com

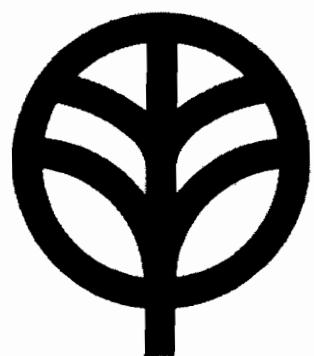

KENWOOD
HI/FI STEREO COMPONENTS

SERVICE MANUAL


**KT-8300
(KT-9900)**

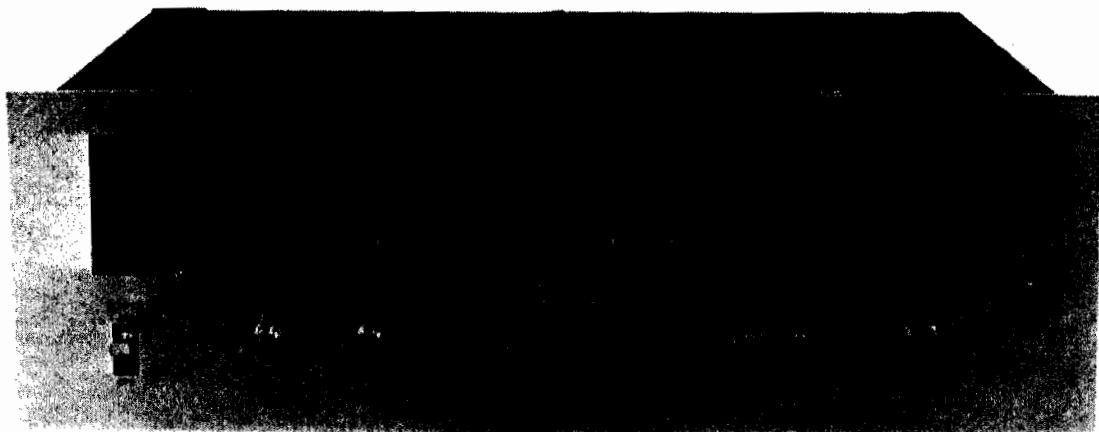





AM-FM STEREO TUNER

CONTENTS

EXTERNAL & INTERNAL VIEW	3
DIAL CORD STRINGING	4
BLOCK DIAGRAM	4
CIRCUIT DESCRIPTIONS	5
ADJUSTMENTS	7
DESTINATIONS' PARTS LIST	8
PARTS LIST	
TOTAL	9
POWER SUPPLY (X00-1760-11, -61)	9
FM FRONT-END (X01-1220-10)	9
AM TUNER (X03-1020-10)	10
FM TUNER (X05-1350-10)	10
PC BOARD	
POWER SUPPLY	13
FM FRONT-END	13
AM TUNER	13
FM TUNER	14
SCHEMATIC DIAGRAM	15
SPECIFICATIONS	16
TROUBLESHOOTING	16

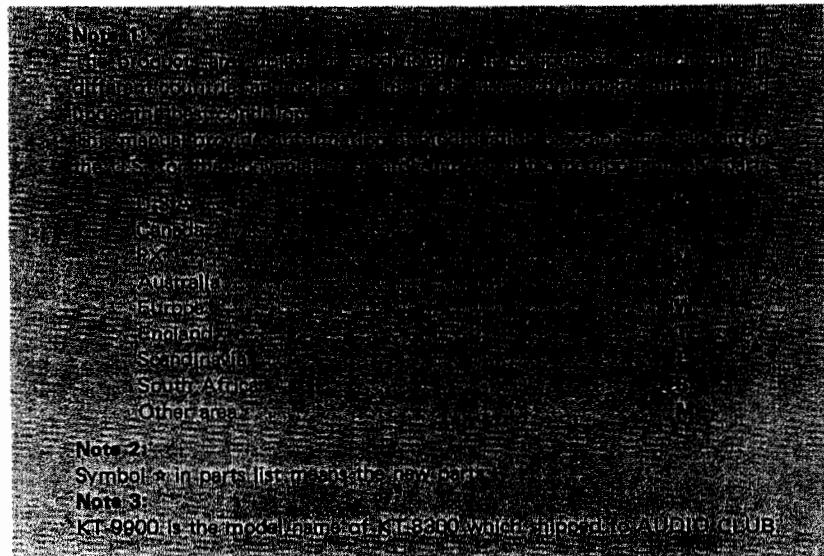

EXTERNAL & INTERNAL VIEW

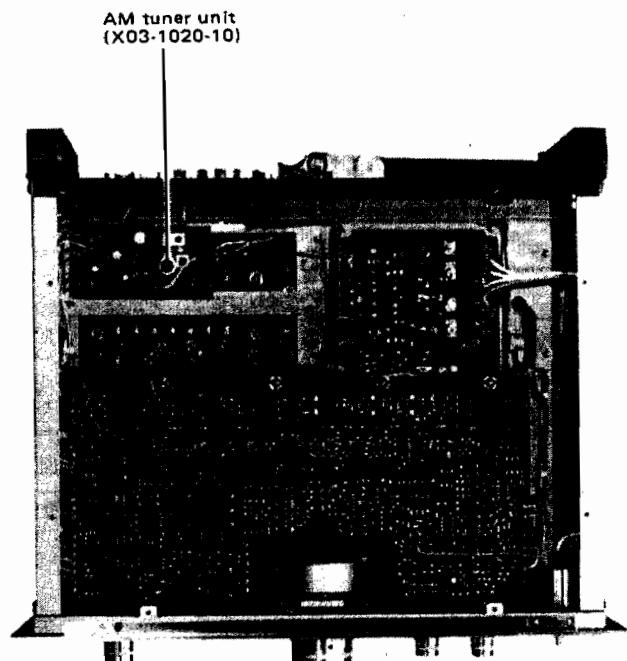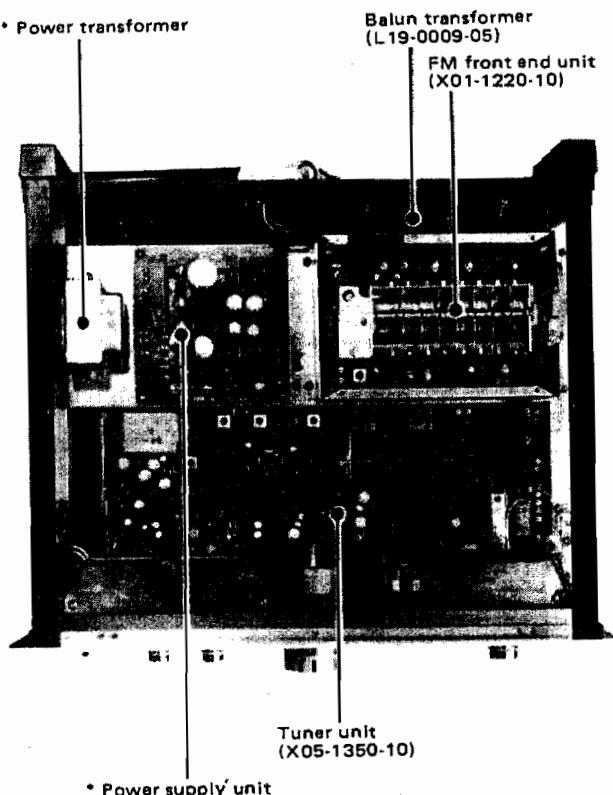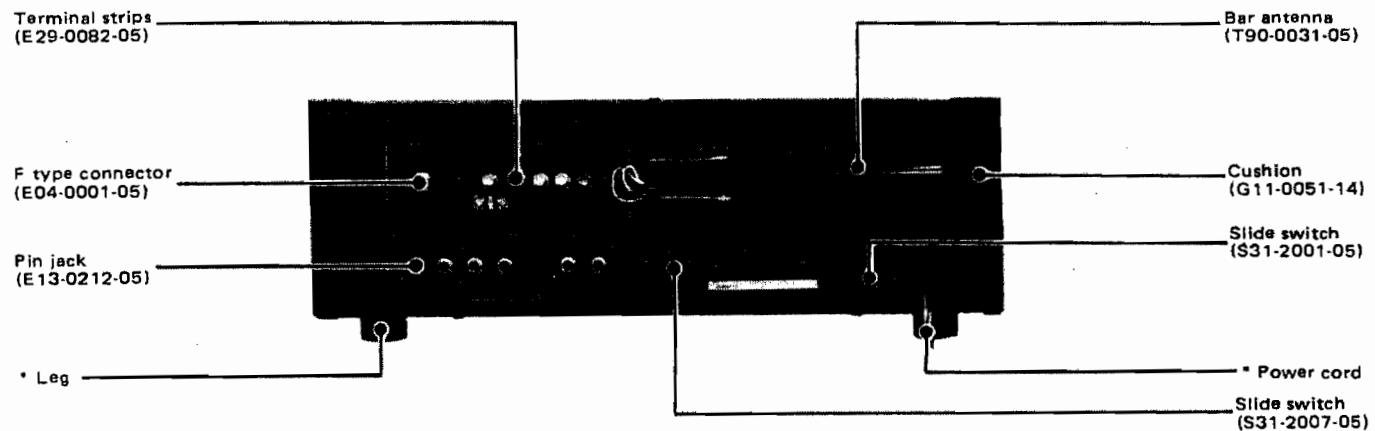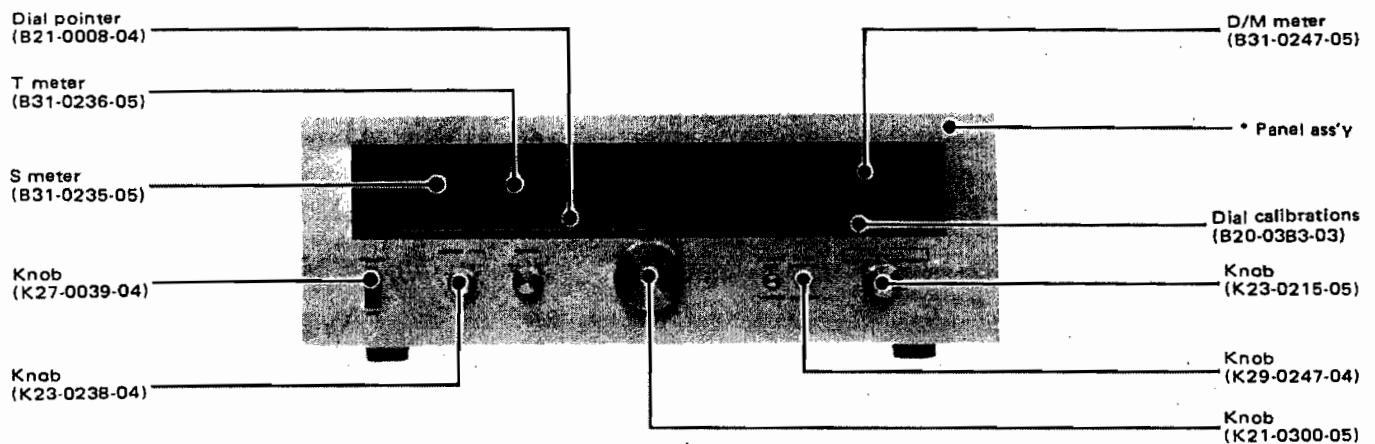


* Refer to
Destinations' parts list.


DIAL CORD STRINGING/BLOCK DIAGRAM

DIAL CORD STRINGING

1. Fully close the variable capacitor.
2. Assemble the dial pulley (A) with the pulley (B) and fix them on the shaft of the variable capacitor using 2 screws.
3. Tie the end of the dial cord to the boss (C) as shown.
4. Dress the dial cord in the direction of "1" to "2" and wind it 3 turns around the dial shaft starting from its lower side.
5. Dress the dial cord in the direction of "3" through "8" and wind it 2 turns around the pulley (B) starting from its lower side. Then, wind it 2 turns around the boss at the rear side and tie the end of it.
6. Mount the dial pointer as shown in the illustration.

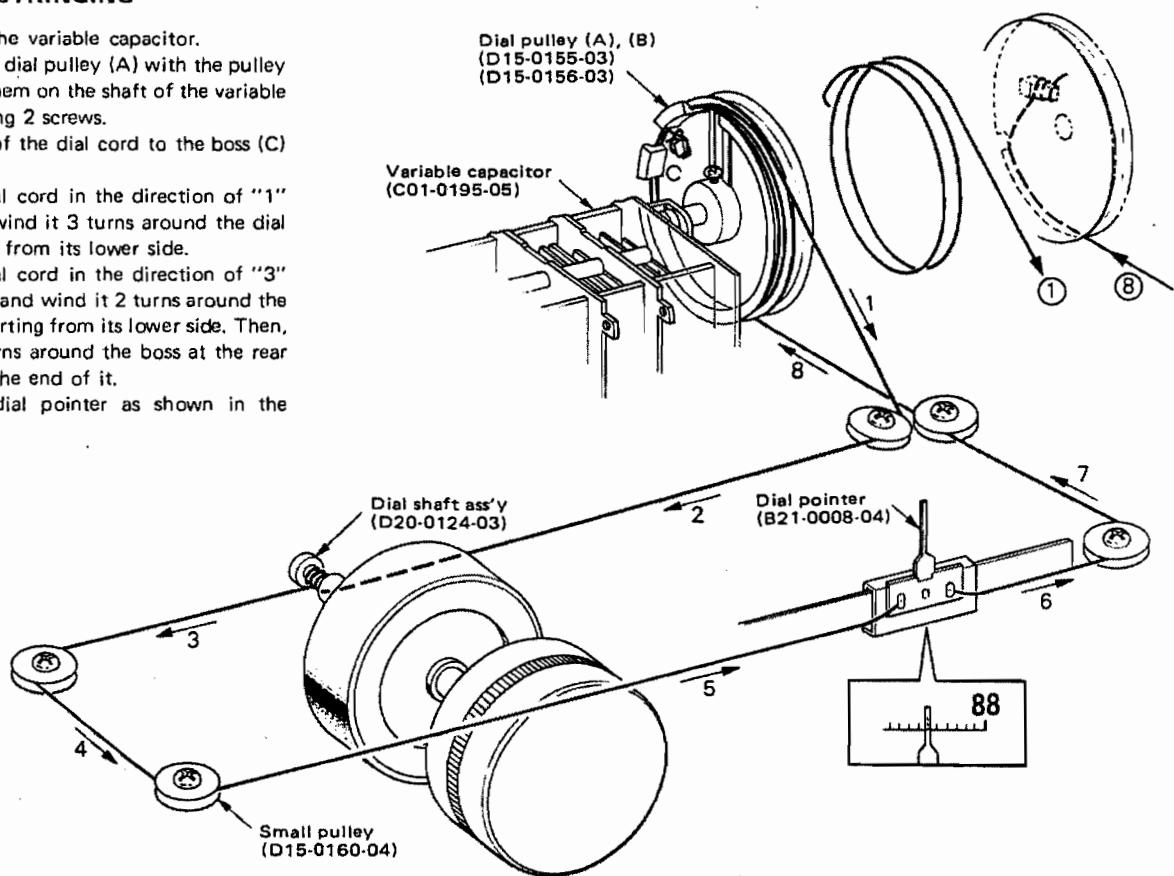

BLOCK DIAGRAM

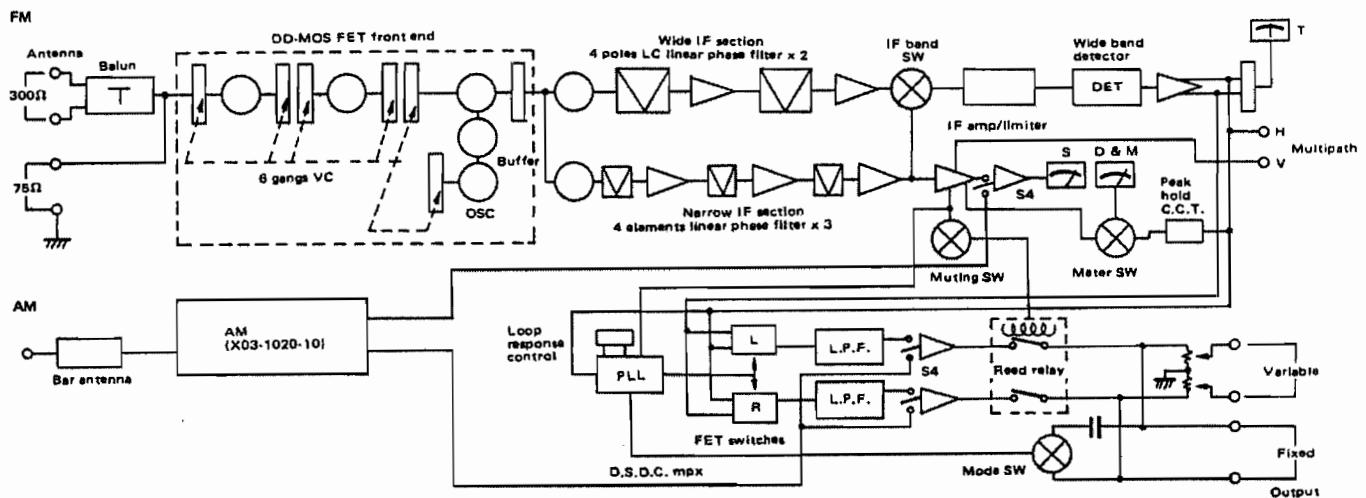

CIRCUIT DESCRIPTIONS

FM-RF (X01-1220-10)

1. ADOPTION OF DD TYPE DUAL GATE MOS-FET (Qa1, Qa2)

The RF amplifier employs DD (Double-Diffused) type MOS-FET elements. This type of FET has been processed through diffusion repeated twice, and hence it offers a better high-frequency characteristic and a shorter channel length to be controlled by gate potential. The noteworthy features are (1) preferable large-input characteristic, (2) preferable spurious response and mutual modulation characteristics, (3) sensitivity with low noise figure (NF), and (4) stabilized performance with a small feedback capacity.

2. ADOPTION OF HIGH-ACCURACY 6-GANG VARIABLE CAPACITOR

The high-frequency selective circuit is composed of single-double-double tuning stages. Such a multistage type circuit may often result in degradation of distortion factor. However, this tuning circuit with an optimum Q has been designed by the adoption of a high-accuracy 6-gang variable capacitor with minimal tracking and gang errors, and by the reduction of load capacity realized by DD type MOS-FET. Thus, preferable image rejection, spurious response, and IF interference characteristics are obtained without sacrificing distortion characteristics.

3. MIXER WITH MOS-FET (Qa3)

A dual gate MOS-FET is employed to suppress mutual modulation in the mixing stage.

4. LOCAL OSCILLATOR

A buffer circuit assures the stabilized supply of local oscillation output to the mixer so that the characteristics for AM suppression and cross-modulation can be improved. Since the local oscillator is joined with the variable capacitor, there is no error between actual setting and circuit operation.

TUNER (X05-1350-10)

FM-IF

The IF circuit can be switched over to NARROW or WIDE. The wide-band circuit is composed of Qg1, FLg1, Qg35, ICg1, FLg2, Qg36, ICg2, and Lg4. FLg1 and FLg2 are a 4-pole LC concentrated filter having a ideal group-delay characteristic. Qg35 and Qg36 compose an emitter-follower circuit which prevents deterioration of group-delay characteristic when a large input is applied.

The narrow-band circuit is composed of Qg2, FLg3, ICg3, FLg4, ICg4, FLg5, ICg5, and Lg4. FLg3, FLg4, and FLg5 are a 4-element phase linear type ceramic filter with excellent group-delay characteristics. These make it possible to obtain a selectivity of 110 dB. Switching over between NARROW and WIDE is effected by switching on ICg2 or ICg5. (This selection is possible with S1.) ICg2 or ICg5 is switched off when No. 2 terminal is grounded. After passing through the wide band or narrow band circuit, the 10.7 MHz IF signal is amplified at ICg6, ICg7, and ICg8, and then transmitted to the DET circuit.

Function of Qg38: When the IF circuit is switched over either to NARROW or WIDE, the muting circuit is switched on to suppress shock noise.

FM-DET

The detector circuit is assembled into a unit (W02-0005-05). It is a wide-band detector circuit of multivative detection system. This system is composed of phase shifter, wave shaping circuit, and multiplier having a low distortion characteristic. The detection band width is 5 MHz and a low distortion characteristic of 0.04% is realized over more than 1 MHz range. SN ratio is more than 85 dB. This detector circuit generates balanced output.

FM-MPX

The balanced output from the detector circuit is amplified by ICg11 and the main signal is fed to DSDC (Double switching demodulator circuit) through emitter-follower Qg17. The sub-signal for left channel passes through emitter-follower Qg15 and that for right channel passes through emitter-follower Qg16, both fed to DSDC. In this way, the newly designed DSDC cancels the leak components of right and left demodulators with exclusively installed canceling circuits. Adjustment for channel separation is independently performed at right and left circuits. Therefore separation for both channels can be adjusted to optimum values respectively.

As an analog switch, an excellent FET is used for MPX demodulator switching to obtain low distortion factor and high separation characteristic. This FET switching system is put to practical use by uniquely-designed FET driving circuit. Distortion factor of this circuit is less than 0.02% in monaural and less than 0.05% in stereo reproduction. Qg22, Qg24, Qg26, and Qg28 repeat on-off performance at 38 kHz to obtain the function of FET switching. Dg7 ~ 10 are used for the improvement of distortion characteristics.

CIRCUIT DESCRIPTIONS

The 38 kHz switching signal is generated by ICg12. The composite signal is amplified at Qg18 and applied to No. 11 terminal of ICg12. The 38 kHz sub-carrier signal is obtained from No. 4 and 5 terminals. A pilot signal is taken out of the composite signal by the aid of filter function of PLL. However, if the loop response is too fast, this filter function will be weakened and the sub-carrier will be mixed with main- and sub-signals, thus giving rise to a sort of cross-modulation distortion. Most part of distortion in the high-frequency range during stereo reproduction is caused by this phenomenon. Also in the low-frequency range, there will be a peak distortion in the vicinity of 200 Hz due to jitter in PLL (phase difference by LPF leakage). In order to eliminate high-frequency and jitter distortions, the input level of PLL (No. 11 terminal) is lowered after the stereo indicating lamp has been lit up. This delays the loop response (capture range narrowed), and increases the filter effect. In practical usage, emitter resistance of Qg18 is changed by Qg19 to give variation in amplification degree. In this manner, the amount of composite signal into ICg12 is increased or decreased. Qg19 is turned off while broadcast signals are received.

AUDIO AMP

The audio signals demodulated for the right and left channels enter the emitter-follower circuit of Qg29 or Qg30. After a carrier leak has been removed at low-pass filter FLg6, these signals are amplified at the final amplifier of ICg13 and generated as tuner output.

ACCESSORY CIRCUITS

1. S METER (FM)

A signal for the S meter passes through the AGC AMP of Qg5 ~ 7, is amplified at 1/2 ICg10, and is detected at Dg5. Indication is almost linear up to 1 mV while the SN ratio is completely saturated.

2. MULTIPATH METER

A signal for the multipath meter is amplified at 1/2 ICg10 and detected at Dg13. This meter is used to detect the AM component in 10.7 MHz IF signal and to supervise the amount of multi-path.

3. DEVIATION METER

The peak value of modulation is indicated by percentage, regarding deviation of 75 kHz as 100%. The composite signal is amplified at ICg14 and detected at Dg11 and Dg12. The obtained output is used to give deflections at the deviation meter. Qg33 is used to prevent the deflection at the muting level or lower.

4. T METER

A difference in balanced outputs (in reverse phase) from the multivative detector (W02-0005-05) is used to give deflections at the T meter.


5. MUTING

The muting control signal is obtained from the AND circuit by utilizing the following 3 signals: (1) signal for deflecting the S meter (varied with input level), (2) signal from IF circuit, and (3) signal obtained from the S curve of DET through S-M conversion.

When the signal of (1) above is obtained, Qg12 is turned on. The signal of (2) is the detection output obtained from the circuit consisting of ICg9, Lg11, Dg2, and Dg3. This signal causes Qg13 to be turned on. The signal of (3) is obtained from the S curve of DET through S-M conversion effected by the phase detector circuit consisting of Qg8 and Qg9. With this signal, Qg10 is turned off and Qg11 is turned on when broadcast signals are received. Qg14 is turned off when all of Qg11 ~ 13 are turned on. It clears the muting function. If at least one of Qg11 ~ 13 is turned off, Qg14 is turned on and the muting function is obtained.

Qg31 and Qg32 are used to compose a relay driving circuit which can be switched on or off by a muting control signal or by a signal which can be obtained after the set has been energized (rectified signal from Dk3).

The muting circuit can be set to either of the two purposes. It can be used for the major purpose of interstation noise suppression, or when a high-quality station (SN ratio being 50 dB or higher) is selected for stereo reception.

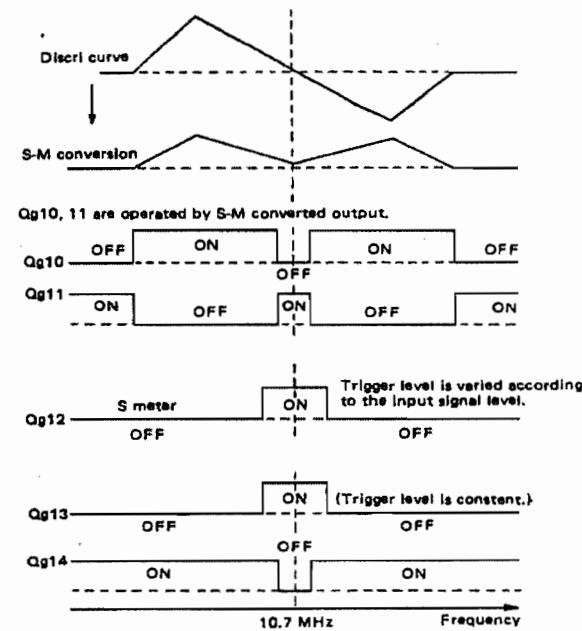

ADJUSTMENTS


TEST EQUIPMENTS

RF signal generator RF-SG
 Oscilloscope scope
 Solid state volt meter (input impedance: more than $1M\Omega$) .. SSVM
 DC volt meter DCVM
 FM stereo generator MPX-SG
 Frequency counter
 Distortion meter


NOTE

- Tuning dial is set to the proper point corresponding to no radio stations.
- RF-SG is set to the lower response possible on oscilloscope.
- The output level of RF-SG is made a 6 dB drop by the dummy ant.
- The input level 60 dB means 66 dB on RF-SG.
- Repeat TRACKING adjustment several times and confirm the reception of broadcasting.
- Test point is shown in the schematic diagram.


No.	ALIGN	TEST EQUIPMENTS		TUNER SETTING	OUTPUT INDICATOR	ADJUSTMENT POINTS	REMARKS
		CONNECTION	SETTING				
FM SECTION							
1	DISCRIMINATOR	—	—	—	T meter	VRg4	Make the pointer position in the center of the meter (at Narrow mode)
						VRg12	Make the pointer position in the center of the meter (at Wide mode)
2	TRACKING	RF-SG to ANT terminal via dummy ant.	90 MHz 1 kHz (Mod) 75 kHz (Dev)	90 MHz	SSVM, distortion meter & scope to output jack (L)	Ta1 ~ 5	Maximum deflection, minimum distortion
			105 MHz 1 kHz (Mod) 75 kHz (Dev)	105 MHz		TCa1 ~ 5	
4 Repeat "DISCRIMINATOR" adjustment							
6	IF TRIGGER	RF-SG to ANT terminal via dummy ant.	100 MHz 0 (Dev) 60 dB	100 MHz	DCVM to TP1	Lg11	Maximum DC voltage
			100 MHz 0 (Dev) 10 dB	- ditto -		Ta6	Maximum DC voltage
6	IF TRIGGER LEVEL	- ditto -	100 MHz 0 (Dev) 60 dB	- ditto -	- ditto -	VRg2	Adjust DC voltage to 1.8 V
7	IF GAIN	—	—	—	- ditto -	VRg1	Adjust DC voltage to 0.6 V
8	S METER	RF-SG to ANT terminal via dummy ant.	100 MHz 0 (Dev) 60 dB	100 MHz	S meter	VRg3	Make the pointer indication "5" digit
9	MUTING LEVEL	- ditto -	100 MHz 0 (Dev) 16 dB	- ditto -	SSVM & scope to output jack (L)	VRg9	Adjust VRg9 so that muting operation is on
10	VCO	—	—	—	Frequency counter to TP2	VRg7	Adjust VCO frequency to 19 kHz
11	OUTPUT LEVEL	- ditto -	100 MHz 1 kHz (Mod) 75 kHz (Dev) 60 dB	100 MHz	SSVM & scope to FM DET OUT	VRg10	Adjust OUTPUT LEVEL to 300 mV
12	SEPARATION	MPX-SG: SELECTOR → L or R 1 kHz (Mod) RF-SG: 100 MHz, 60 dB 68.25 kHz (Dev)	- ditto -	SSVM & scope to output jack (R)	VRg6	Minimum deflection	
					VRg5	Minimum deflection	
13	DISTORTION	- ditto -	MPX-SG: SELECTOR → L + R 1 kHz (Mod) RF-SG: 100 MHz, 60 dB 75 kHz (Dev)	- ditto -	SSVM, scope & distortion meter to output jack (L)	Ta6	Minimum distortion
14	DEVIATION METER	RF-SG to ANT terminal via dummy ant.	100 MHz 1 kHz (Mod) 75 kHz (Dev) 60 dB	- ditto -	D meter	VRg8	100% deflection
AM SECTION							
1	IF	RF-SG to ANT terminal via dummy ant.	1000 kHz 400 Hz, 30% (Mod) 100 dB	1000 kHz	SSVM & scope to output jack (L)	L14	Maximum deflection
2	TRACKING	- ditto -	600 kHz 400 Hz, 30% (Mod) 100 dB	600 kHz	- ditto -	L13 Bar antenna	- ditto -
			1400 kHz 400 Hz, 30% (Mod) 100 dB	1400 kHz		TCa6, 7	



AM UNIT
(X03-1020-10)

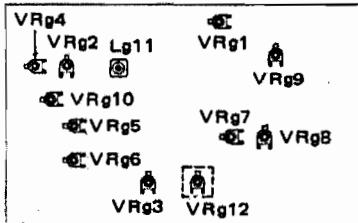

FM TUNER
(X05-1350-10)

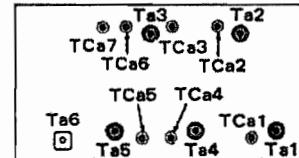

RF UNIT
(X01-1220-10)

DESTINATIONS' PARTS LIST

Ref. No.	U.S.A. (K)	Canada (P)	PX (J)	Australia (X)	Europe (W)	Scandinavia (L)	England (T)	Other Areas (M)	KTR-9900 (M2)	Description
C3, 4	CQ09S1H- 202G(B)	CQ09S1H- 202G(B)	CQ09S1H- 202G(B)	—	—	—	—	CQ09S1H- 202G(B)	CQ09S1H- 202G(B)	Polystyrene capacitor 2000pF ±2%
	—	—	—	CQ09S1H- 102G(B)	CQ09S1H- 102G(B)	CQ09S1H- 102G(B)	—	—	—	Polystyrene capacitor 1000pF ±2%
—	A20-1060-02	A20-1060-02	A20-1060-02	A20-1060-02	A20-1060-02	A20-1060-02	A20-1060-02	A20-1060-02	A20-1078-02	Panel ass'y *
—	A30-0110-02	A30-0110-02	A30-0110-02	A30-0110-02	A30-0110-02	A30-0110-02	A30-0111-02	A30-0110-02	A30-0112-02	Dial board *
—	B46-0056-00	B46-0055-10	B46-0050-00	—	—	—	—	—	—	Warranty card
—	—	—	B46-0051-00	—	—	—	—	—	—	Warranty card
—	B50-1513-00	B50-1513-00	B50-1513-00	B50-1513-00	B50-1513-00	B50-1514-00	B50-1513-00	B50-1545-00	—	Instruction manual *
—	—	—	B59-0018-00	—	—	—	—	—	—	Kenwood service stations' list
—	D32-0075-04 x 1	D32-0075-04 x 2	D32-0075-04 x 2	D32-0075-04 x 2	D32-0075-04 x 1	D32-0075-04 x 1	D32-0075-04 x 2	D32-0075-04 x 2	D32-0075-04 x 2	Switch stopper
—	E29-0047-04	—	—	—	—	—	—	—	—	Lead hold for bar antenna
—	E30-0181-05	E30-0181-05	E30-0185-05	E30-0185-05	E30-0459-05	E30-0292-05	040-0304-05	E30-0545-05	E30-0545-05	Power cord
—	H01-1589-14	H01-1590-14	H01-1589-14	H01-1589-14	H01-1589-14	H01-1589-14	H01-1591-14	H01-1592-14	Carton case	
—	H20-0394-04	H20-0394-04	H20-0394-04	H20-0394-04	H20-0394-04	H20-0394-04	H20-0416-04	H20-0394-04	H20-0394-04	Polythylene cover
—	—	—	—	—	—	—	H40-0004-04	—	—	Rust preventing paper
—	J02-0049-14	J02-0049-14	J02-0049-14	J02-0049-14	J02-0049-14	J02-0049-14	J02-0049-14	J02-0049-14	J02-0049-14	Leg x 4
—	J41-0034-05	J41-0034-05	J41-0024-15	J41-0024-15	J41-0033-05	J41-0033-05	J41-0024-15	J41-0034-05	J41-0034-05	Power cord bushing
—	—	—	—	—	—	J61-0038-05	J61-0038-05	—	—	Cord band
—	L01-1141-05	L01-1141-05	L01-1145-05	L01-1146-05	L01-1142-05	L01-1147-05	L01-1145-05	L01-1145-05	L01-1145-05	Power transformer
S5	S33-2008-15	S33-2016-05	S33-2008-15	S33-2008-15	S33-2017-05	S33-2017-05	S33-2016-05	S33-2008-15	S33-2008-15	Lever switch (POWER)
—	—	—	S31-2001-05	—	—	—	S31-2001-05	S31-2001-05	S31-2001-05	Slide switch (Power voltage selector)
—	X00-1760-11	X00-1760-00	X00-1760-00	X00-1760-61	X00-1760-61	X00-1760-61	X00-1760-00	X00-1760-00	X00-1760-00	Power supply unit

* : new parts

PARTS LIST

* : new parts

Ref. No.	Parts No.	Description	Remarks
CAPACITOR			
C1, 2	CK45D1H561M	Ceramic 560pF ±20%	
SEMICONDUCTOR			
CN1~3	V11-0392-05	LED GD-4-203CD x 3	
SWITCH			
S6	S31-2001-05	Slide (DIMMER)	
S7	S31-2007-05	Slide (DE-EMPHASIS)	
MISCELLANEOUS			
-	A48-0027-03	Side plate x 2	
-	A52-0016-03	Top plate	
-	B07-0162-04	Ring x 2	
-	B10-0204-03	Front glass	
-	B19-0192-04	Lighting acryl resin board	*
-	B19-0193-04	Lighting acryl resin board	*
-	B20-0383-03	Dial calibrations	*
-	B21-0008-04	Dial pointer	*
-	B30-0116-05	Pilot lamp (8V 300mA fuse type) x 2	
-	B30-0123-05	Pilot lamp (8V 300mA white) x 3	*
-	B31-0235-05	S meter	
-	B31-0236-05	T meter	
-	B31-0247-05	D/M meter	*
-	B42-0009-04	Passed sticker	
-	D15-0155-03	Dial pulley (A)	
-	D15-0156-03	Dial pulley (B)	
-	D15-0160-04	Small pulley	
-	D19-0050-14	Back plate	
-	D20-0124-03	Dial shaft ass'y	*
-	E04-0001-05	F-type connector	
-	E05-0125-05	F-type plug	
-	E13-0212-05	Pin jack (2P) x 3	
-	E29-0082-05	Antenna terminal	
-	E30-0505-05	Audio cord	
-	F99-0011-04	Slider	
-	G01-0312-04	Spring x 2	
-	G01-0314-04	Dial spring	
-	G11-0051-14	Cushion x 2	
-	H10-1348-12	Polystyrene foamed fixture	
-	H10-1349-12	Polystyrene foamed fixture	
-	H25-0048-03	Polyethylene bag (110 x 250mm)	
-	H25-0078-00	Instruction bag	
-	H25-0096-04	Polyethylene bag	
-	J13-0034-05	Fuse holder x 2	
-	J19-0306-05	Lead holder x 2	
-	J21-0480-13	Antenna mounting hardware	
-	J32-0227-04	Boss	*
-	J42-0065-04	Lamp bushing x 3	
-	J61-0024-05	Wire clip (small) x 2	
-	J61-0045-05	Combex x 5	
-	K21-0300-04	Knob (TUNING)	
-	K23-0215-04	Knob (MODE)	
-	K23-0238-04	Knob (LEVEL, MUTING)	
-	K27-0039-04	Knob (POWER)	
-	K29-0247-04	Knob (Pushbutton) x 2	
-	L19-0009-05	Balun transformer	
-	N08-0125-05	Dress screw (8 mm) x 8	
-	N09-0100-14	Screw (small pulley) x 5	

Ref. No.	Parts No.	Description	Remarks
-	T90-0002-05	FM indoor antenna	
-	T90-0031-05	AM bar antenna	
-	X01-1220-00	FM front-end	*
-	X03-1020-10	AM tuner unit	*
-	X05-1350-10	FM tuner unit	*

POWER SUPPLY (X00-1760-11, -61)

Ref. No.	Parts No.	Description	Remarks
CAPACITOR			
Ck1~4	CK45E2H103P	Ceramic 0.01μF 500WV	
Ck5	C90-0325-05	Electrolytic 2200μF 25WV	
Ck6	CE04W1E471EL	Electrolytic 470μF 25WV	
Ck7	CE04W1E221EL	Electrolytic 220μF 25WV	
Ck8	CE04W1E101EL	Electrolytic 100μF 25WV	
Ck9,10	CQ93M1H223M	Myler 0.022μF ±20%	
Ck11	CE04W1C471EL	Electrolytic 470μF 16WV	
Ck12	CE04W1C221EL	Electrolytic 220μF 16WV	
Ck13	CS15E1E3R3M	Tantalum 3.3μF 25WV	
Ck14	CS15E1E6R8M	Tantalum 6.8μF 25WV	
Ck15	C91-0001-05	Ceramic 0.01μF 125WV	-11
	CK45E3D103PMU	Ceramic 0.01μF 2kWV	-61

Ref. No.	Parts No.	Description	Remarks
RESISTOR			
Rk1	PD14BY2E183J	Carbon 180Ω ±5% 1/4W	
Rk2	PD14BY2E471J	Carbon 470Ω ±5% 1/4W	
Rk3	PD14BY2E181J	Carbon 180Ω ±5% 1/4W	
Rk4	PD14BY2E331J	Carbon 330Ω ±5% 1/4W	
Rk5	RN14AB3D4R7JB	Metal film 4.7Ω ±5% 2W	
Rk6	PD14BY2E824J	Carbon 820kΩ ±5% 1/4W	
Rk7	PD14BY2E182J	Carbon 1.8kΩ ±5% 1/4W	
Rk8	RC05GF2H225K	Carbon 2.2MΩ ±10% 1/2W	-11

Ref. No.	Parts No.	Description	Remarks
SEMICONDUCTOR			
Qk1	V03-0343-05	Transistor 2SC1419 (C)	
Qk2	V01-0116-05	Transistor 2SA755 (C)	
Qk3	V03-0270-05	Transistor 2SC945 (Q) or (R)	
Dk1	V11-0252-05	Diode SIRB10 (100V, 1A)	
Dk2, 3	V11-0295-05	Diode W06B (100V, 0.75A)	
Dk4	V11-0273-05	Diode 1S2076 (30V, 150mA)	
DZk1,2	V11-0254-05	Zener diode YZ-140(14V, 500mW)	

Ref. No.	Parts No.	Description	Remarks
MISCELLANEOUS			
Fk1,2	F05-8018-05	Fuse 800mA (UL) x 2	-11
	F05-8012-05	Fuse 800mA (S) x 2	-61
	F05-8015-05	Fuse 800mA (J) x 2	-00
Fk3	F05-3021-06	Fuse 3A (UL)	-11
	F05-3122-05	Fuse 3.15A (S)	-61
	F05-3022-05	Fuse 3A (J)	-00
-	J13-0020-05	Fuse holder (φ6 x 30) x 6	-00 -11
-	J13-0039-05	Fuse holder (φ5 x 20) x 6	-61

FM FRONT-END (X01-1220-10)

Ref. No.	Parts No.	Description	Remarks
CAPACITOR			
Ca1	CC45CH1H080D	Ceramic 8pF ±0.5pF	
Ca2	CC45SL1H330J	Ceramic 33pF ±5%	
Ca3,4	CK45F1H103Z	Ceramic 0.01μF +80%, -20%	
Ca5	CC45SL1H150J	Ceramic 15pF ±5%	
Ca6	CC45CH1H120J	Ceramic 12pF ±5%	
Ca7	CC45CH1H100J	Ceramic 10pF ±5%	
Ca8	CC45SL1H080D	Ceramic 8pF ±0.5pF	
Ca9,10	CK45F1H103Z	Ceramic 0.01μF +80%, -20%	
Ca11	CC45SL1H150J	Ceramic 15pF ±5%	
Ca12	CC45CH1H120J	Ceramic 12pF ±5%	

PARTS LIST

Ref. No.	Parts No.	Description			Re-marks	Ref. No.	Parts No.	Description			Re-marks	
Ca13	C91-0020-05	Ceramic	0.68pF	±20%		Cf17	CK45F1H103Z	Ceramic	0.01μF	+80%, -20%		
Ca14	CC45SL1H150J	Ceramic	15pF	±5%		Cf18	CC45SL1H470K	Ceramic	47pF	±10%		
Ca15	CC45CH1H120J	Ceramic	12pF	±5%				RESISTOR				
Ca16	CC45SL1H221K	Ceramic	220pF	±10%		Rf2	PD14BY2B272J	Carbon	2.7kΩ	±5%	1/8W	
Ca17	CK45F1H103Z	Ceramic	0.01μF	+80%, -20%		Rf3	PD14BY2B122J	Carbon	1.2kΩ	±5%	1/8W	
Ca18	CC45CH1H220J	Ceramic	22pF	±5%		Rf4	PD14BY2B101J	Carbon	100Ω	±5%	1/8W	
Ca19	CK45F1H103Z	Ceramic	0.01μF	+80%, -20%		Rf5	PD14BY2B682J	Carbon	6.8kΩ	±5%	1/8W	
Ca20	CQ93M1H103K	Mylar	0.01μF	±10%		Rf6,7	PD14BY2B103J	Carbon	10kΩ	±5%	1/8W	
Ca21	CC45CH1H060D	Ceramic	6pF	±0.5pF		Rf8	PD14BY2B222J	Carbon	2.2kΩ	±5%	1/8W	
Ca22	CK45F1H103Z	Ceramic	0.01μF	+80%, -20%		Rf9	PD14BY2B104J	Carbon	100kΩ	±5%	1/8W	
RESISTOR												
Ra1	PD14CY2E154J	Carbon	150kΩ	±5%	1/4W	Rf10	PD14BY2B222J	Carbon	2.2kΩ	±5%	1/8W	
Ra2	PD14CY2E473J	Carbon	47kΩ	±5%	1/4W	Rf11	PD14BY2B562J	Carbon	5.6kΩ	±5%	1/8W	
Ra3	PD14CY2E104J	Carbon	100kΩ	±5%	1/4W	Rf12	PD14BY2B104J	Carbon	100kΩ	±5%	1/8W	
Ra4	PD14CY2E824J	Carbon	820kΩ	±5%	1/4W	Rf13	PD14BY2B391J	Carbon	390Ω	±5%	1/8W	
Ra5	PD14CY2E221J	Carbon	220Ω	±5%	1/4W	Rf14	PD14BY2B183J	Carbon	18kΩ	±5%	1/8W	
Ra6	PD14CY2E682J	Carbon	6.8kΩ	±5%	1/4W			SEMICONDUCTOR				
Ra7	PD14CY2E154J	Carbon	150kΩ	±5%	1/4W	Icf1	V30-0134-05	IC	HA1151			
Ra8	PD14CY2E473J	Carbon	47kΩ	±5%	1/4W	Qf2	V03-0270-05	Transistor	2SC945 (Q)			
Ra9	PD14CY2E104J	Carbon	100kΩ	±5%	1/4W	D11	V11-0076-05	Diode	1S1555			
Ra10	PD14CY2E221J	Carbon	220Ω	±5%	1/4W			COIL / INDUCTOR / FILTER				
Ra11,12	PD14CY2E104J	Carbon	100kΩ	±5%	1/4W	Lf1	L40-1021-43	Inductor	1 mH			
Ra13	PD14CY2E820J	Carbon	82Ω	±5%	1/4W	Lf2	L30-0284-06	IFT				
Ra14	PD14CY2E682J	Carbon	6.8kΩ	±5%	1/4W	Lf3	L32-0181-05	OSC coil				
Ra15	PD14CY2E562J	Carbon	5.6kΩ	±5%	1/4W	Lf4	L72-0036-05	Ceramic filter				
Ra16	PD14CY2E682J	Carbon	6.8kΩ	±5%	1/4W							
Ra17	PD14CY2E391J	Carbon	390Ω	±5%	1/4W							
Ra18	PD14CY2E102J	Carbon	1kΩ	±5%	1/4W							
Ra19	PD14CY2E104J	Carbon	100kΩ	±5%	1/4W							
SEMICONDUCTOR												
Qa1,2	V09-0108-05	FET	SD306					CAPACITOR			Re-marks	
Qa3	V09-0103-05	FET	3SK49 (R)									
TRIMMER / COIL												
Tca1~5	C05-0010-15	Ceramic trimmer				Cg1~33	CK45F1H103Z	Ceramic	0.01μF	+80%, -20%		
Tca6,7	C05-0013-15	Ceramic trimmer				Cg34	CQ93M1H562J	Mylar	5600pF	±5%		
Ta1	L31-0377-05	FM ANT coil				Cg35,36	CK45F1H103Z	Ceramic	0.01μF	+80%, -20%		
Ta2	L31-0382-05	FM RF coil				Cg37	CK45D1H561M	Ceramic	560pF	±20%		
Ta3	L31-0379-05	FM RF coil				Cg38	CE04W1H010	Electrolytic	1μF	50WV		
Ta4,5	L31-0382-05	FM RF coil				Cg39	CE04W1H3R3	Electrolytic	3.3μF	50WV		
Ta6	L30-0246-05	FM IFT				Cg40	CE04W1H010	Electrolytic	1μF	50WV		
La1,2	L33-0025-05	Choke coil				Cg41~45	CK45F1H103Z	Ceramic	0.01μF	+80%, -20%		
La3	L40-1091-41	Ferrri-inductor				Cg46	CE04W1H010MBR	Electrolytic	1μF	50WV		
MISCELLANEOUS												
—	C01-0195-05	Variable capacitor			★	Cg47	CE04W1H3R3MBR	Electrolytic	3.3μF	50WV		
—	E29-0086-04	Lead plate			★	Cg48	CE04W1H010MBR	Electrolytic	1μF	50WV		
AM TUNER (X03-1020-10)												
Ref. No.	Parts No.	Description			Re-marks	Cg49,50	CK45F1H103Z	Ceramic	0.01μF	+80%, -20%		
						Cg51	CE04W1C221	Electrolytic	220μF	16WV		
						Cg52	CE04W1C101	Electrolytic	100μF	16WV		
						Cg53	CE04W1C100MBR	Electrolytic	10μF	16WV		
						Cg54,55	CE04W1H010MBR	Electrolytic	1μF	50WV		
						Cg56	CE04W1H3R3	Electrolytic	3.3μF	50WV		
						Cg57	CE04W1E100	Electrolytic	10μF	25WV		
						Cg58	CE04W1H3R3MBR	Electrolytic	3.3μF	50WV		
						Cg59	CE04W1C470MBR	Electrolytic	47μF	16WV		
						Cg60	CE04W1C470MBR	Electrolytic	0.01μF	±10%		
						Cg61	CE04W1C470MBR	Electrolytic	100pF	±10%		
						Cg62	CQ93M1H103K	Mylar	0.01μF	±10%		
						Cg63	CC45SL1H101K	Ceramic	100pF	±10%		
						Cg64	CQ93M1H103K	Mylar	0.01μF	±10%		
						Cg65	CE04W1H010	Electrolytic	1μF	50WV		
						Cg66	CQ93M1H334M	Mylar	0.33μF	±20%		
						Cg67	CE04W1C100MBR	Electrolytic	10μF	16WV		
						Cg68	CE04W1C470MBR	Electrolytic	47μF	16WV		
						Cg69	CQ93M1H361J	Polystyrene	360pF	±5%		
						Cg70	CE04W1C470	Electrolytic	47μF	16WV		
						Cg71,72	CE04W1H010MBR	Electrolytic	1μF	50WV		
						Cg73~76	CC45SL1H270K	Ceramic	27pF	±10%		
						Cg77,78	CE04W1C101	Electrolytic	100μF	15WV		
						Cg79,80	CE04W1H010MBR	Electrolytic	1μF	50WV		
						Cg81,82	CC45SL1H330K	Ceramic	33pF	±10%		
						Cg83,84	CQ93M1H102GB	Polystyrene	1000pF	±2%		
						Cg85~88	CQ93M1H154K	Mylar	0.15μF	±10%		
						Cg89,90	CE04W1A470EL	Electrolytic	47μF	10WV		

PARTS LIST


Ref. No.	Parts No.	Description			Re-marks	Ref. No.	Parts No.	Description			Re-marks
Cg91	CQ93M1H223K	Mylar	0.022μF	±10%		Rg55	PD14BY2B103JKW	Carbon	10kΩ	±5%	1/8W
Cg92	CE04W1H010	Electrolytic	1μF	50WV		Rg56	PD14BY2B224JKW	Carbon	220kΩ	±5%	1/8W
Cg93	CK45D1H391M	Ceramic	390pF	±20%		Rg57	R92-0161-05	Carbon	3.9kΩ	±5%	1/8W
Cg94	CE04W1H010	Electrolytic	1μF	50WV		Rg58,59	RN14AB2E562JMA	Metal film	5.6kΩ	±5%	1/4W
Cg95	CQ93M1H473M	Mylar	0.047μF	50WV		Rg60	PD14BY2B471JKW	Carbon	470Ω	±5%	1/8W
Cg96	CE04W1E100	Electrolytic	10μF	25WV		Rg61	PD14BY2B471JKW	Carbon	470Ω	±5%	1/8W
Cg97	CE04W1A101	Electrolytic	100μF	10WV		Rg62	PD14BY2B472JKW	Carbon	4.7kΩ	±5%	1/8W
Cg98	CC45SL1H270K	Ceramic	27pF	±10%		Rg63,64	PD14BY2B473JKW	Carbon	47kΩ	±5%	1/8W
Cg101~103	CK45F1H103Z	Ceramic	0.01μF	+80%, -20%		Rg65	PD14BY2B273JKW	Carbon	27kΩ	±5%	1/8W
Cg104	CC45SL1H030C	Ceramic	3pF	±0.25pF		Rg66	PD14BY2B223JKW	Carbon	22kΩ	±5%	1/8W
Cg105	CK45F1H473Z	Ceramic	0.047μF	+80%, -20%		Rg67	PD14BY2B103JKW	Carbon	10kΩ	±5%	1/8W
Cg106	CK45F1H103Z	Ceramic	0.01μF	+80%, -20%		Rg68,69	PD14BY2B223JKW	Carbon	22kΩ	±5%	1/8W
Cg107	CC45SL1H050C	Ceramic	5pF	±0.25pF		Rg71,72	PD14BY2B103JKW	Carbon	10kΩ	±5%	1/8W
Cg108,109	CK45F1H103Z	Ceramic	0.01μF	+80%, -20%		Rg73	PD14BY2B562JKW	Carbon	5.6kΩ	±5%	1/8W
Cg110	CC45SL1H050C	Ceramic	5pF	±0.25pF		Rg74	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W
Cg111	CK45F1H103Z	Ceramic	0.01μF	+80%, -20%		Rg75,76	PD14BY2B103JKW	Carbon	10kΩ	±5%	1/8W
Cg112	CE04W1C101	Electrolytic	100μF	16WV		Rg77,78	PD14BY2B223JKW	Carbon	22kΩ	±5%	1/8W
Cg114	CK45F1H103Z	Ceramic	0.01μF	+80%, -20%		Rg79	RN14AB2E562JMA	Metal film	5.6kΩ	±5%	1/4W
Cg115	CS15E1VR22M	Tantalum	0.22μF	35WV		Rg80	PD14BY2B271JKW	Carbon	270Ω	±5%	1/8W
Cg116,117	CE04W1C100MBR	Electrolytic	10μF	16WV		Rg81	PD14BY2B103JKW	Carbon	10kΩ	±5%	1/8W
RESISTOR											
Rg1	PD14BY2B471JKW	Carbon	470Ω	±5%	1/8W	Rg82,83	PD14BY2B562JKW	Carbon	5.6kΩ	±5%	1/8W
Rg2	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W	Rg84	PD14BY2B272JKW	Carbon	2.7kΩ	±5%	1/8W
Rg3	PD14BY2B561JKW	Carbon	560Ω	±5%	1/8W	Rg85	PD14BY2B184JKW	Carbon	180kΩ	±5%	1/8W
Rg4	PD14BY2B102JKW	Carbon	1kΩ	±5%	1/8W	Rg86	PD14BY2B273JKW	Carbon	27kΩ	±5%	1/8W
Rg5	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W	Rg87	PD14BY2B272JKW	Carbon	2.7kΩ	±5%	1/8W
Rg6	PD14BY2B561JKW	Carbon	560Ω	±5%	1/8W	Rg88	PD14BY2B561JKW	Carbon	560Ω	±5%	1/8W
Rg7	PD14BY2B122JKW	Carbon	1.2kΩ	±5%	1/8W	Rg89	PD14BY2B271JKW	Carbon	270Ω	±5%	1/8W
Rg8	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W	Rg90,91	PD14BY2B333JKW	Carbon	33kΩ	±5%	1/8W
Rg9,10	PD14BY2B331JKW	Carbon	330Ω	±5%	1/8W	Rg92	PD14BY2E824JKW	Carbon	820kΩ	±5%	1/8W
Rg11	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W	Rg93	PD14BY2E274JKW	Carbon	270kΩ	±5%	1/8W
Rg12,13	PD14BY2B331JKW	Carbon	330Ω	±5%	1/8W	Rg94,95	PD14BY2B153JKW	Carbon	15kΩ	±5%	1/8W
Rg14	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W	Rg96	PD14BY2B181JKW	Carbon	180Ω	±5%	1/8W
Rg15	PD14BY2B331JKW	Carbon	330Ω	±5%	1/8W	Rg97	PD14BY2B223JKW	Carbon	22kΩ	±5%	1/8W
Rg16	PD14BY2B561JKW	Carbon	560Ω	±5%	1/8W	Rg98	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W
Rg17	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W	Rg99	PD14BY2B222JKW	Carbon	2.2kΩ	±5%	1/8W
Rg21	PD14BY2B102JKW	Carbon	1kΩ	±5%	1/8W	Rg100,101	PD14BY2B822JKW	Carbon	8.2kΩ	±5%	1/8W
Rg22	PD14BY2B122JKW	Carbon	1.2kΩ	±5%	1/8W	Rg102,103	PD14BY2B103JKW	Carbon	10kΩ	±5%	1/8W
Rg23	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W	Rg104~107	PD14BY2B154JKW	Carbon	150kΩ	±5%	1/8W
Rg24	PD14BY2B122JKW	Carbon	1.2kΩ	±5%	1/8W	Rg108	PD14BY2B562JKW	Carbon	5.6kΩ	±5%	1/8W
Rg25	PD14BY2B561JKW	Carbon	560Ω	±5%	1/8W	Rg109	PD14BY2B223JKW	Carbon	22kΩ	±5%	1/8W
Rg26	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W	Rg110	PD14BY2B562JKW	Carbon	5.6kΩ	±5%	1/8W
Rg27	PD14BY2B102JKW	Carbon	1kΩ	±5%	1/8W	Rg111	PD14BY2B223JKW	Carbon	22kΩ	±5%	1/8W
Rg28	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W	Rg112	PD14BY2B562JKW	Carbon	5.6kΩ	±5%	1/8W
Rg29	PD14BY2B103JKW	Carbon	10kΩ	±5%	1/8W	Rg113	PD14BY2B223JKW	Carbon	22kΩ	±5%	1/8W
Rg30	PD14BY2B222JKW	Carbon	2.2kΩ	±5%	1/8W	Rg114	PD14BY2B562JKW	Carbon	5.6kΩ	±5%	1/8W
Rg31	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W	Rg115	PD14BY2B223JKW	Carbon	22kΩ	±5%	1/8W
Rg32	PD14BY2B103JKW	Carbon	10kΩ	±5%	1/8W	Rg116	PD14BY2B102JKW	Carbon	1kΩ	±5%	1/8W
Rg33	PD14BY2B123JKW	Carbon	12kΩ	±5%	1/8W	Rg117,118	PD14BY2B104JKW	Carbon	100kΩ	±5%	1/8W
Rg34	PD14BY2B102JKW	Carbon	1kΩ	±5%	1/8W	Rg119,120	PD14BY2B332JKW	Carbon	3.3kΩ	±5%	1/8W
Rg35	PD14BY2B332JKW	Carbon	3.3kΩ	±5%	1/8W	Rg121,122	PD14BY2B222JKW	Carbon	2.2kΩ	±5%	1/8W
Rg36	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W	Rg123,124	PD14BY2E332JKW	Carbon	3.3kΩ	±5%	1/4W
Rg37	PD14BY2B8222JKW	Carbon	8.2kΩ	±5%	1/8W	Rg125,126	RN14BK2E303KFMA	Metal film	30kΩ	±1%	1/4W
Rg38	PD14BY2B563JKW	Carbon	56kΩ	±5%	1/8W	Rg127,128	PD14BY2E563JKW	Carbon	56kΩ	±5%	1/4W
Rg39	PD14BY2B331JKW	Carbon	330Ω	±5%	1/8W	Rg129,130	PD14BY2E272JKW	Carbon	2.7kΩ	±5%	1/4W
Rg40	PD14BY2B222JKW	Carbon	2.2kΩ	±5%	1/8W	Rg131~134	PD14BY2E124JKW	Carbon	120kΩ	±5%	1/4W
Rg41	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W	Rg135,136	PD14BY2E102JKW	Carbon	1kΩ	±5%	1/4W
Rg42	PD14BY2B562JKW	Carbon	5.6kΩ	±5%	1/8W	Rg137,138	PD14BY2E104JKW	Carbon	100kΩ	±5%	1/4W
Rg43	PD14BY2B103JKW	Carbon	10kΩ	±5%	1/8W	Rg139~142	PD14BY2E222JKW	Carbon	2.2kΩ	±5%	1/4W
Rg44	PD14BY2B563JKW	Carbon	56kΩ	±5%	1/8W	Rg144,145	PD14BY2B104JKW	Carbon	100kΩ	±5%	1/8W
Rg45	PD14BY2B104JKW	Carbon	100kΩ	±5%	1/8W	Rg146	PD14BY2B392JKW	Carbon	3.9kΩ	±5%	1/8W
Rg46	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W	Rg147	PD14BY2B104JKW	Carbon	100kΩ	±5%	1/8W
Rg47	PD14BY2B103JKW	Carbon	10kΩ	±5%	1/8W	Rg148,149	PD14BY2B563JKW	Carbon	56kΩ	±5%	1/8W
Rg48	PD14BY2B224JKW	Carbon	220kΩ	±5%	1/8W	Rg150~153	PD14BY2E824JKW	Carbon	820kΩ	±5%	1/4W
Rg49	PD14BY2E824JKW	Carbon	820kΩ	±5%	1/8W	Rg154	PD14BY2B332JKW	Carbon	3.3kΩ	±5%	1/8W
Rg50	R92-0161-05	Carbon	3.9kΩ	±5%	1/8W	Rg155	PD14BY2B223JKW	Carbon	22kΩ	±5%	1/8W
Rg51	PD14BY2B223JKW	Carbon	22kΩ	±5%	1/8W	Rg156	PD14BY2B473JKW	Carbon	47kΩ	±5%	1/8W
Rg52	PD14BY2B103JKW	Carbon	10kΩ	±5%	1/8W	Rg157	PD14BY2B682JKW	Carbon	6.8kΩ	±5%	1/8W
Rg53	PD14BY2B123JKW	Carbon	12kΩ	±5%	1/8W	Rg158,159	PD14BY2B102JKW	Carbon	1kΩ	±5%	1/8W
Rg54	PD14BY2B823JKW	Carbon	82kΩ	±5%	1/8W	Rg160,161	PD14BY2B223JKW	Carbon	22kΩ	±5%	1/8W
						Rg162	PD14BY2B103JKW	Carbon	10kΩ	±5%	1/8W
						Rg165	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W

PARTS LIST

Ref. No.	Parts No.	Description			Re-marks
Rg166	PD14BY2B682JKW	Carbon	6.8kΩ	±5%	1/8W
Rg167,168	PD14BY2B102JKW	Carbon	1kΩ	±5%	1/8W
Rg169,170	PD14BY2B562JKW	Carbon	5.6kΩ	±5%	1/8W
Rg171	PD14BY2B103JKW	Carbon	10kΩ	±5%	1/8W
Rg173	PD14BY2B561JKW	Carbon	560Ω	±5%	1/8W
Rg174	PD14BY2B223JKW	Carbon	22kΩ	±5%	1/8W
Rg175	PD14BY2B102JKW	Carbon	1kΩ	±5%	1/8W
Rg176,177	PD14BY2B122JKW	Carbon	1.2kΩ	±5%	1/8W
Rg178	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W
Rg179	PD14BY2B102JKW	Carbon	1kΩ	±5%	1/8W
Rg180,181	PD14BY2B122JKW	Carbon	1.2kΩ	±5%	1/8W
Rg182	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W
Rg183	PD14BY2B102JKW	Carbon	1kΩ	±5%	1/8W
Rg184	PD14BY2B104JKW	Carbon	100kΩ	±5%	1/8W
Rg185	PD14BY2B561JKW	Carbon	560Ω	±5%	1/8W
Rg186	PD14BY2B223JKW	Carbon	22kΩ	±5%	1/8W
Rg187	PD14BY2B561JKW	Carbon	560Ω	±5%	1/8W
Rg188	PD14BY2B331JKW	Carbon	330Ω	±5%	1/8W
Rg189	PD14BY2B393JKW	Carbon	39kΩ	±5%	1/8W
Rg190	PD14BY2B154JKW	Carbon	150kΩ	±5%	1/8W
Rg191	PD14BY2B223JKW	Carbon	22kΩ	±5%	1/8W
Rg192	PD14BY2B101JKW	Carbon	100Ω	±5%	1/8W
Rg193	PD14BY2B563JKW	Carbon	56kΩ	±5%	1/8W
Rg194	PD14BY2B153JKW	Carbon	15kΩ	±5%	1/8W
Rg195	PD14BY2B102JKW	Carbon	1kΩ	±5%	1/8W
Rg196,197	PD14BY2B104JKW	Carbon	100kΩ	±5%	1/8W
SEMICONDUCTOR					
Qg1,2	V09-0071-05	FET	2SK55 (D)		
Qg5~7	V03-0098-05	Transistor	2SC535 (B)		
Qg8,9	V01-0084-05	Transistor	2SA733 (P) or (Q)		
Qg10~14	V03-0405-05	Transistor	2SC945 (P) or (Q)		
Qg15~17	V03-0309-05	Transistor	2SC1345 (D) or (E)		
Qg18,19	V03-0405-05	Transistor	2SC945 (P) or (Q)		
Qg20,21	V09-0092-05	FET	2SK68 (L) or (M)		
Qg22	V03-0271-05	Transistor	2SC1345 (E)		
Qg23	V09-0092-05	FET	2SK68 (L) or (M)		
Qg24	V03-0271-05	Transistor	2SC1345 (E)		
Qg25	V09-0092-05	FET	2SK68 (L) or (M)		
Qg26	V03-0271-05	Transistor	2SC1345 (E)		
Qg27	V09-0092-05	FET	2SK68 (L) or (M)		
Qg28	V03-0271-05	Transistor	2SC1345 (E)		
Qg29,30	V03-0309-05	Transistor	2SC1345 (D) or (E)		
Qg31,32	V03-0405-05	Transistor	2SC945 (P) or (Q)		
Qg33	V01-0084-05	Transistor	2SA733 (P) or (Q)		
Qg35,36	V03-0098-05	Transistor	2SC535 (B)		
Qg38	V03-0405-05	Transistor	2SC945 (P) or (Q)		
Qg39	V03-0309-05	Transistor	2SC1345 (D) or (E)		
ICg1~7	V30-0087-05	IC	TA7060P		
ICg8	V30-0177-05	IC	μPC577H (E) or (F)		
ICg9	V30-0087-05	IC	TA7060P		
ICg10	V30-0088-05	IC	RC4558T		
ICg11	V30-0091-05	IC	RC4558TA		
ICg12	V30-0099-05	IC	HA1156W		
ICg13	V30-0091-05	IC	RC4558TA		
ICg14	V30-0088-05	IC	RC4558T		
Dg1~5	V11-0051-05	Diode	1N60		
Dg6	V11-0076-05	Diode	1S1555 or 1S2076		
Dg7~11	V11-0051-05	Diode	1N60		
Dg12,13	V11-0076-05	Diode	1S1555 or 1S2076		
15~18					
Dg19,20	V11-0051-05	Diode	1N60		
Dg21~23	V11-0076-05	Diode	1S1555 or 1S2076		
POTENTIOMETER					
VRg1	R12-1029-05	PC trimmer	1kΩ		
VRg2,3	R12-5025-05	PC trimmer	100kΩ		
VRg4	R12-0058-05	PC trimmer	470Ω		
VRg5,6	R12-3041-05	PC trimmer	10kΩ		
VRg7	R12-2020-05	PC trimmer	6.8kΩ		
VRg8	R12-3041-05	PC trimmer	10kΩ		
SWITCH / RELAY					
S1,3	S42-2013-05	Pushbutton switch		IF BAND, METER	☆
S2	S29-1092-05	Slide rotary switch		MUTING	☆
S4	S29-1083-05	Slide rotary switch		SELECTOR	☆
RLg2	S51-2033-05	Reed relay			
COIL / INDUCTOR / FILTER					
Lg1	L40-2291-41	Ferri-inductor			
Lg2,3	L40-2201-03	Ferri-inductor			
Lg4 ~6	L30-0247-05	FM IF coil			
Lg7,8	L40-2291-41	Ferri-inductor			
Lg9	L40-2201-03	Ferri-inductor			
Lg11	L30-0274-05	FM IF coil			
Lg12	L40-2201-03	Ferri-inductor			
FLg1,2	L79-0032-05	FM IF LC filter		☆	
FLg3~5	L72-0040-05	Ceramic filter		☆	
FLg6	L79-0033-05	Low pass filter			
MISCELLANEOUS					
—	E31-0027-05	Connector (CN2)		☆	
—	E31-0028-05	Connector (CN1)		☆	
—	E31-0029-05	Connector (CN3)		☆	
—	J32-0232-04	Hexagonal boss x 4		☆	
—	W02-0005-05	FM detector unit		☆	


PC BOARD

► POWER SUPPLY (X00-1760-11)

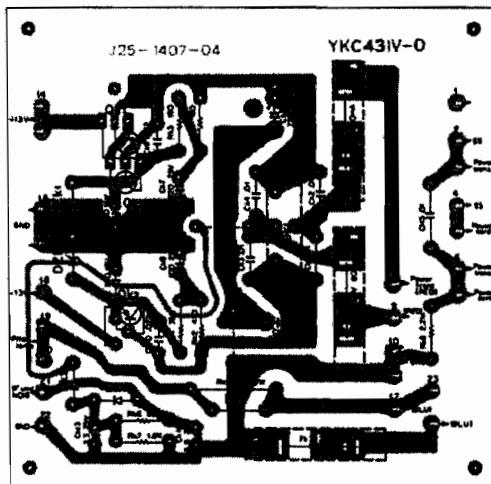


Qk1:2SC1419 (C), Qk2:2SA755 (C), Dk1:S1RB10, Qk3:2SC945 (Q) or (R)
Dk2,3:W0-6B, Dk4:1S2076, DZk1, 2:YZ-140

► FM FRONT-END (X01-1220-10)

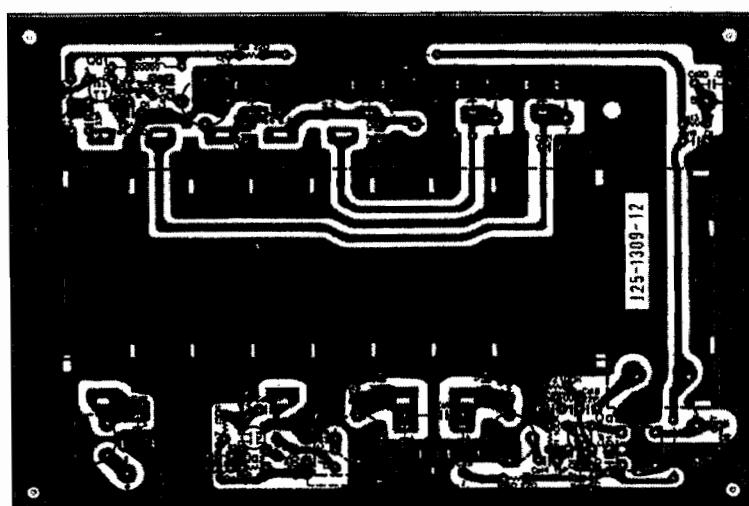

Qa1, 2:SD306, Qa3:3SK49 (R)


► AM TUNER (X03-1020-10)

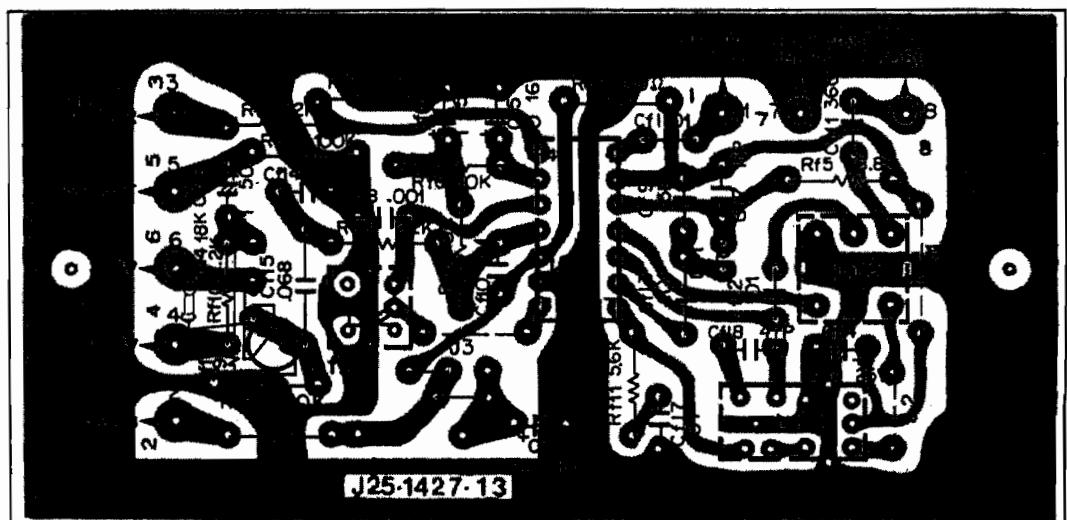


Qf2:2SC945 (Q), Icf1:HA1151, Df1:1S1555

PC BOARD

► FM TUNER
(X05-1350-10)

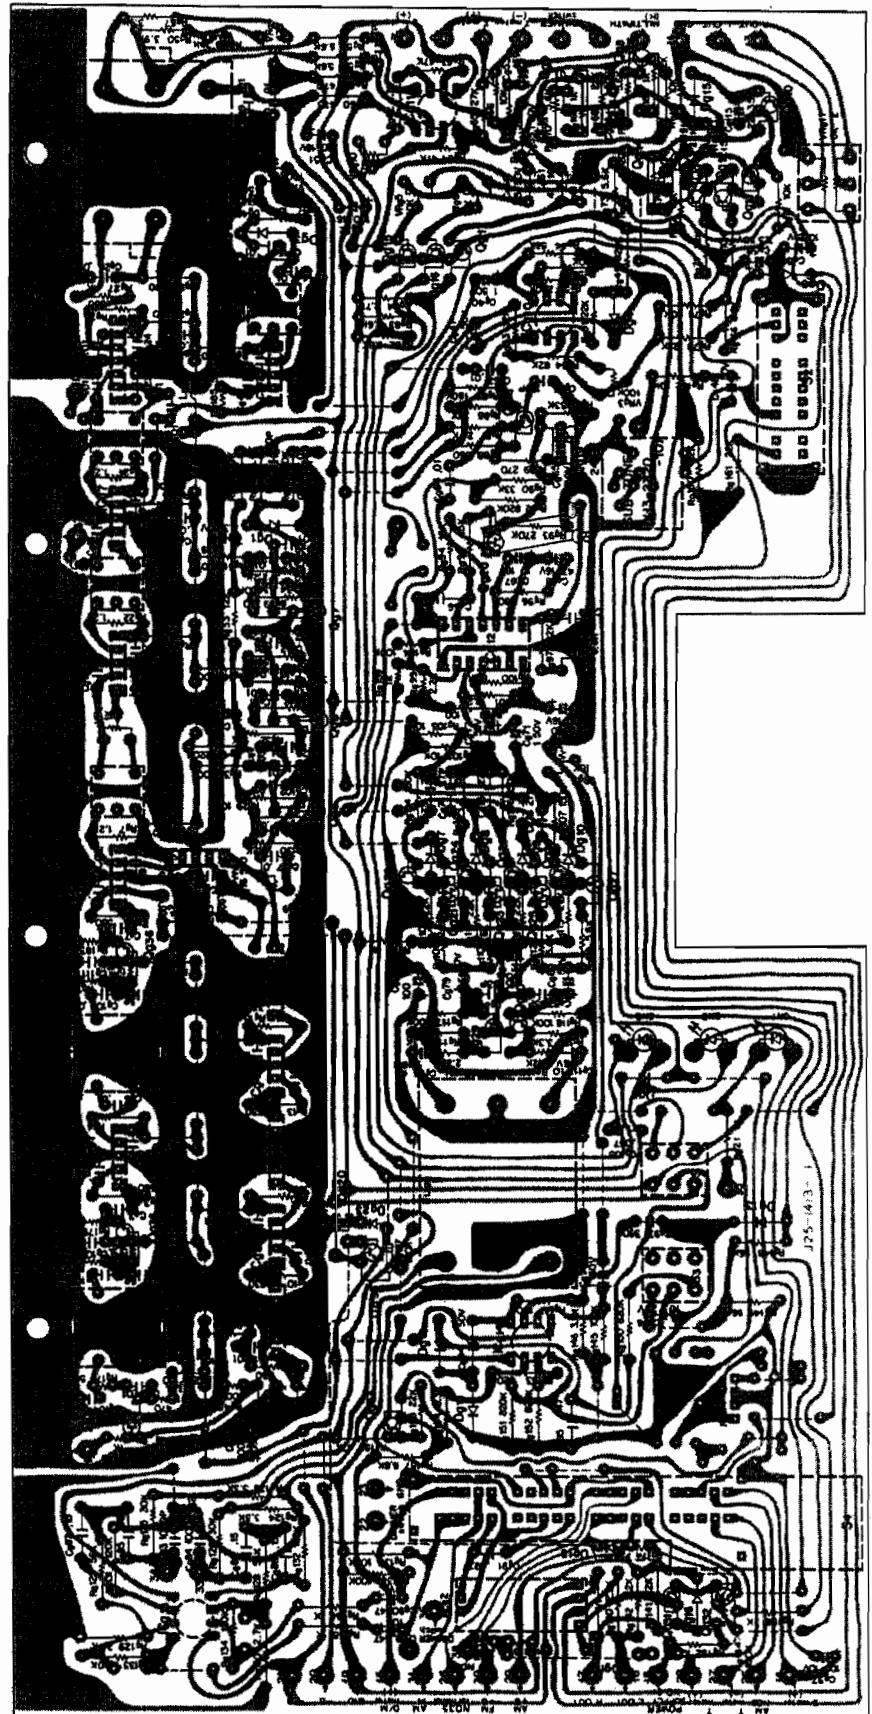

Q91, 2:2SK55 (D), Qg10~14, 18, 19, 31, 32, 38:2SC945 (P) or (Q), Qg5~7, 35, 36:2SC535 (B), Qg8, 9, 33:2SA733 (P) or (Q), Qg15~17, 29, 30:
2SC1345 (D) or (E), Qg20, 21, 23, 25, 27:2SK68 (L) or (M), Qg22, 24, 26, 28:2SC1345 (E), ICg1~7, 9:TA7060P, ICg8:μPC577H (E) or (F),
ICg10, 14:RC4558T, ICg11, 13:RC4558A, ICg12:HA1156W, Dg1~5, 7~11:1N60, Dg6, 12, 13, 15~18, 23:1S1555 or 1S2076

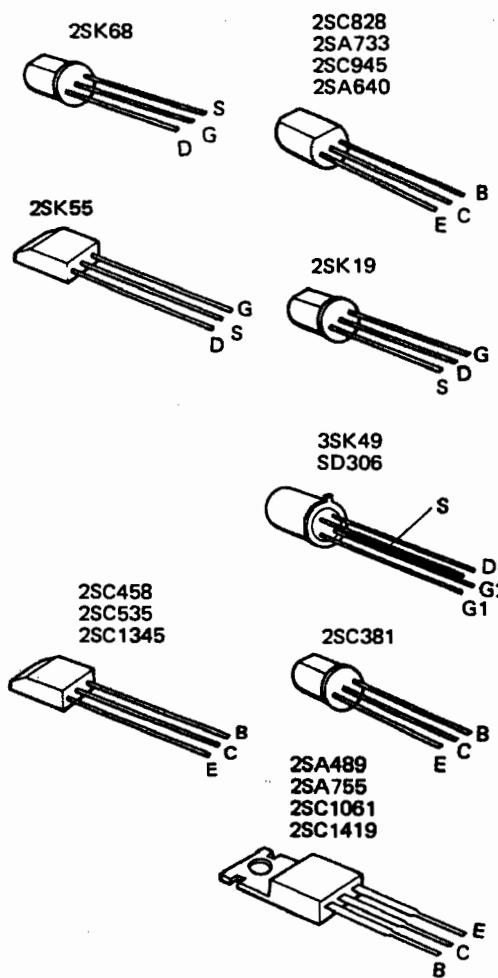

Semiconductor name	Semiconductor substitutions
POWER SUPPLY (X00-1760-11)	
2SA755	2SA489
2SC945 (Q) or (R)	2SC1345
2SC1419 (C)	2SC1061
RF UNIT (X01-1220-10)	
SD306	—
3SK49 (R)	—
AM UNIT (X03-1020-10)	
2SC945 (Q)	2SC1345
HA1151	—
IF MPX AUDIO UNIT (X05-1350-10)	
2SA733 (P) or (Q)	2SA640
2SC535 (B)	2SC381
2SC945 (P) or (Q)	2SC828
2SC1345 (E)	2SC1345
2SK55	2SC1000
2SK68 (L) or (M)	2SK19
HA1156W	2SK30
RC4558TA	—
TA7060P	—
μPC577H (E) or (F)	—

SPECIFICATIONS/TROUBLESHOOTING

SPECIFICATIONS

FM TUNER SECTION

Usable Sensitivity	1.6 μ V
50 dB Quieting Sensitivity	2.8 μ V (Mono), 30 μ V (Stereo)
Signal to Noise Ratio	78 dB (Mono), 75 dB (Stereo)
Muting Threshold	
Muting 1	7 μ V
Muting 2	30 μ V

T.H. Distortion

		Mono	Stereo
	1,000Hz	0.08%	0.1%
Wide	50~10,000Hz	0.1%	0.15%
	15,000Hz	0.15%	0.4%
Narrow	1,000Hz	0.15%	0.4%

Frequency Response	20 Hz to 15,000 Hz, +0.2 dB, -1.5 dB
Capture Ratio	1.0 dB (Wide), 1.5 dB (Narrow)
Alternate Channel Selectivity	40 dB (Wide), 110 dB (Narrow)
Spurious Response Ratio	110 dB
Image Response Ratio	110 dB
IF Response Ratio	110 dB
AM Suppression Ratio	60 dB

Stereo Separation

	1,000 Hz	50~10,000 Hz
Wide	50 dB	45 dB
Narrow	45 dB	35 dB

Subcarrier Product Ratio

70 dB

SCA Rejection Ratio

75 dB

Antenna Impedance

300 ohms balanced &
75 ohms unbalanced

FM Frequency Range

88 MHz to 108 MHz
88.5 MHz to 108 MHz (FTZ approved)

AM TUNER SECTION

Usable Sensitivity (IHF)	18 μ V
Signal to Noise Ratio	50 dB
Image Rejection	60 dB
Selectivity (IHF)	35 dB



OUTPUT LEVEL

FM (400 Hz, 100% Mod.)	Variable 0~1.5V	1.2 k ohms
Fixed	0.75V	1.0 k ohms
AM (400 Hz, 30% Mod.)	Variable 0~0.15V	1.2 k ohms
Fixed	0.075V	1.0 k ohms
Multipath Output	V: 0.1V	H: 0.3V

GENERAL

Power Requirement	50/60 Hz 110~120V, 220~240V
Power Consumption:	22 watts
Dimensions	W 16-15/16" (430mm) H 5-7/8" (149mm) D 14-13/16" (376mm)
Weight	18.7 lbs. (8.5 kg)

TROUBLESHOOTING

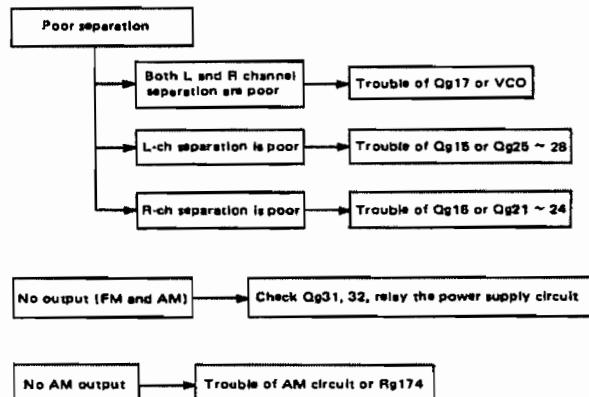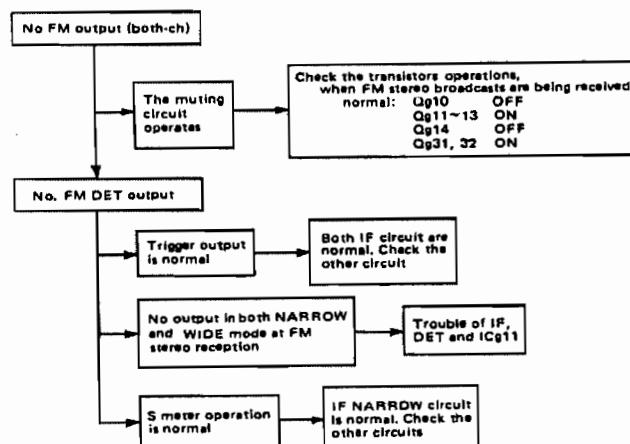

KENWOOD ELECTRONICS, INC.

- 15777 SOUTH BROADWAY, GARDENA, CALIFORNIA 90248 U.S.A.
- 72-02 51ST AVENUE, WOODSIDE, N.Y. 11377 U.S.A.

TRIO-KENWOOD ELECTRONICS, N.V.

- HARENSESTEENWEG, 484, 1800 VILVOORDE, BELGIUM.

TRIO-KENWOOD ELECTRONICS, GmbH.


- 6056 HEUSENSTAMM, RUDOLF-BRAAS-STR. 20, WEST GERMANY

TRIO-KENWOOD CORPORATION

- 3-6-17 AOBADAI, MEGURO-KU, TOKYO, JAPAN.


SUB-TUNER (X13-2320-10)

Dg21,22:1S1555 or 1S2076
Qg39:2SC1345(D) or E1

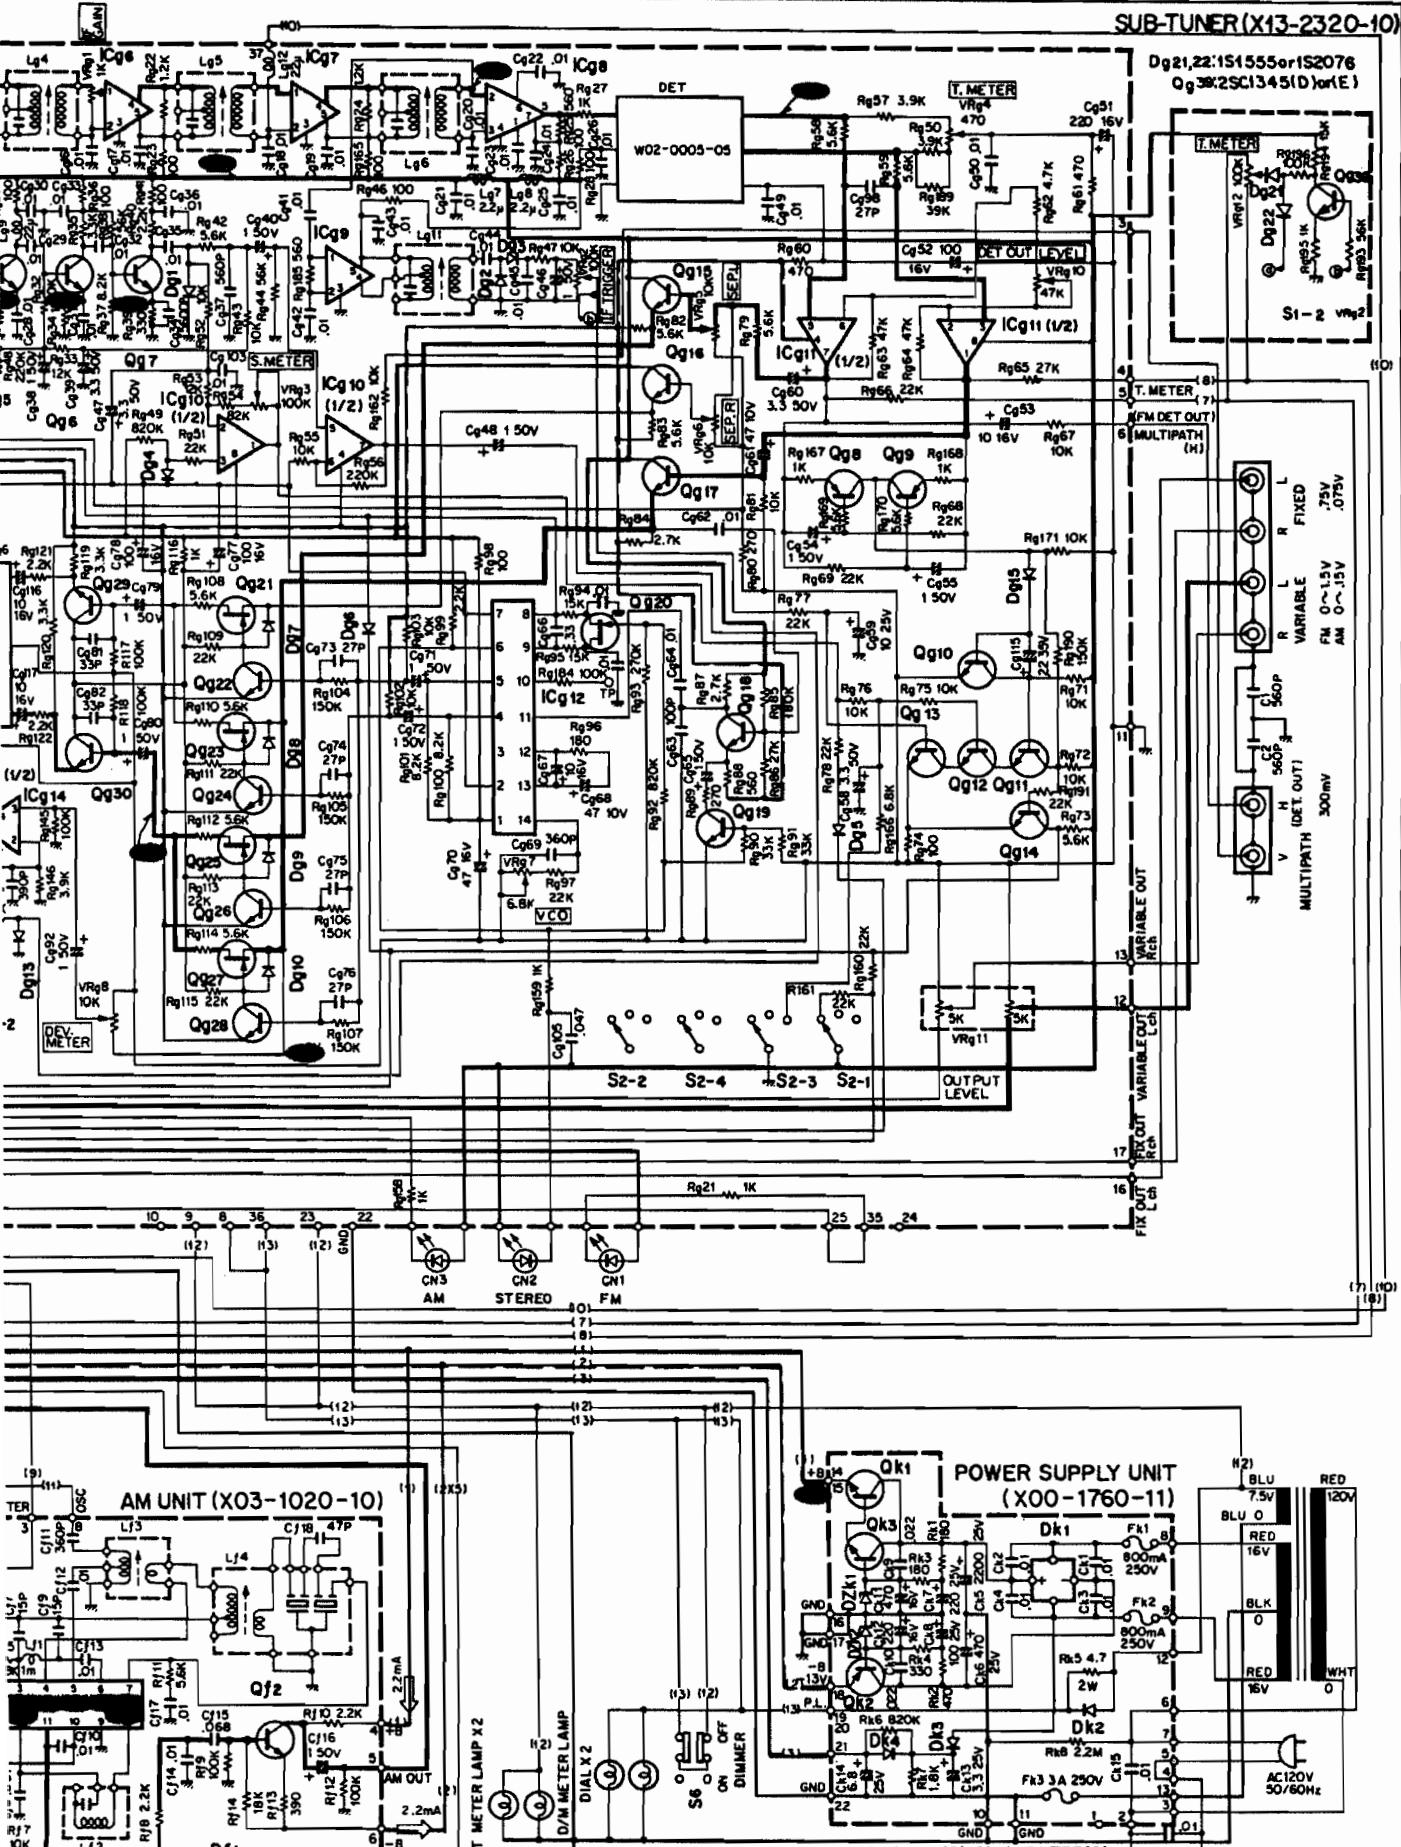


Qk1:2SC1419(C), Qk2:2SA755(C)
Qk3:2SC945 (Q) or (R)
Dk1:SIRB10 Dk2,3:WO-6B
Dk4:1S2076 DzK1,2:YZ-140

KT-8300 (K)

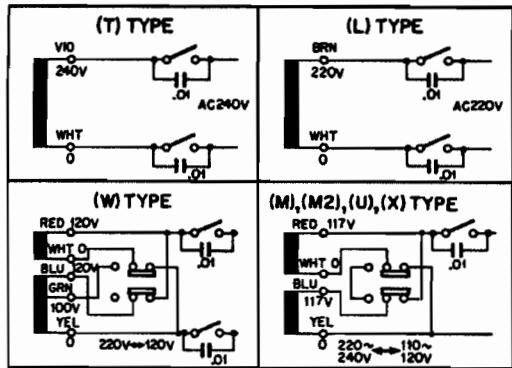


POWER OUTPUT MUTING TUNING

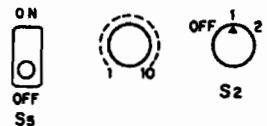


IF BAND METER
 WIDE DEVIATION
 NARROW MULTIPATH


SELECTOR
 AUTO 4 MPX FILTER
 AM

Qg1,2:2SK55(D), Qg10~14,18,19,31,32,34:2SC945(P)or(Q)
 Qgs~7,35,36:2SC535(B), Qg8,9,33:2SA733(P) or (Q)
 Qg15~17,29,30:2SC1345(D)or(E), Qg20,21,23,25,27:2SK68(L)
 or (M), Qg22,24,26,28:2SC1345(E), Qg19,20:IN60
 Dg1~5,7~11:1N60, Dg6:2S3,45~18,23:S1555 or S12076
 ICg1~7,9:TA7060P, ICg8:μPC577H(E)or(F), ICg10,14:RC4556T
 ICg11,13:RC4558TA, ICg12:HA1156W




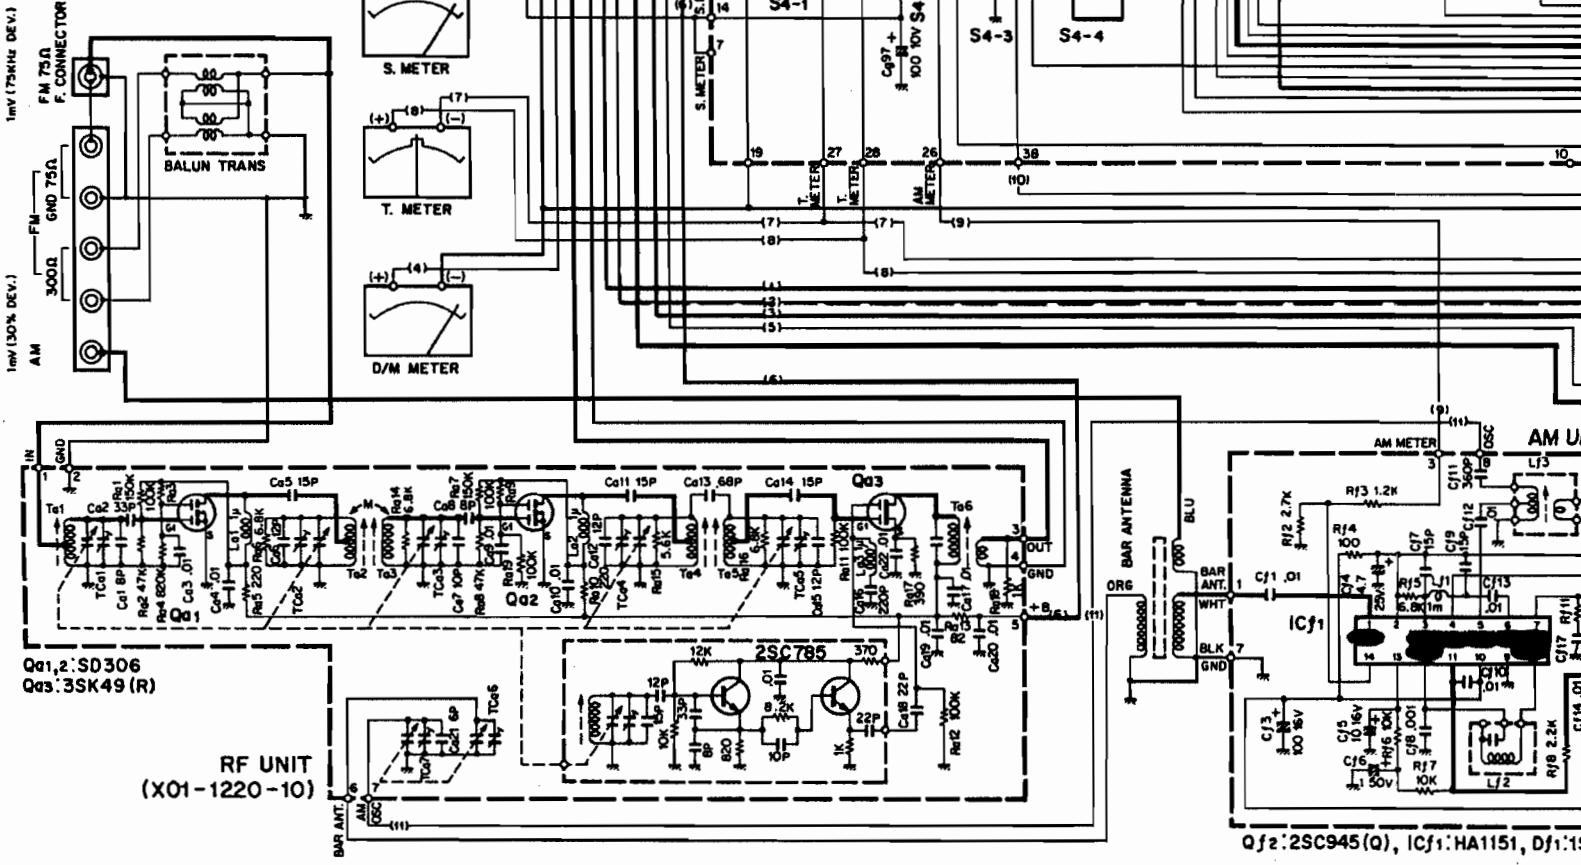


IF MPX AUDIO UNIT (X05-1350-10)

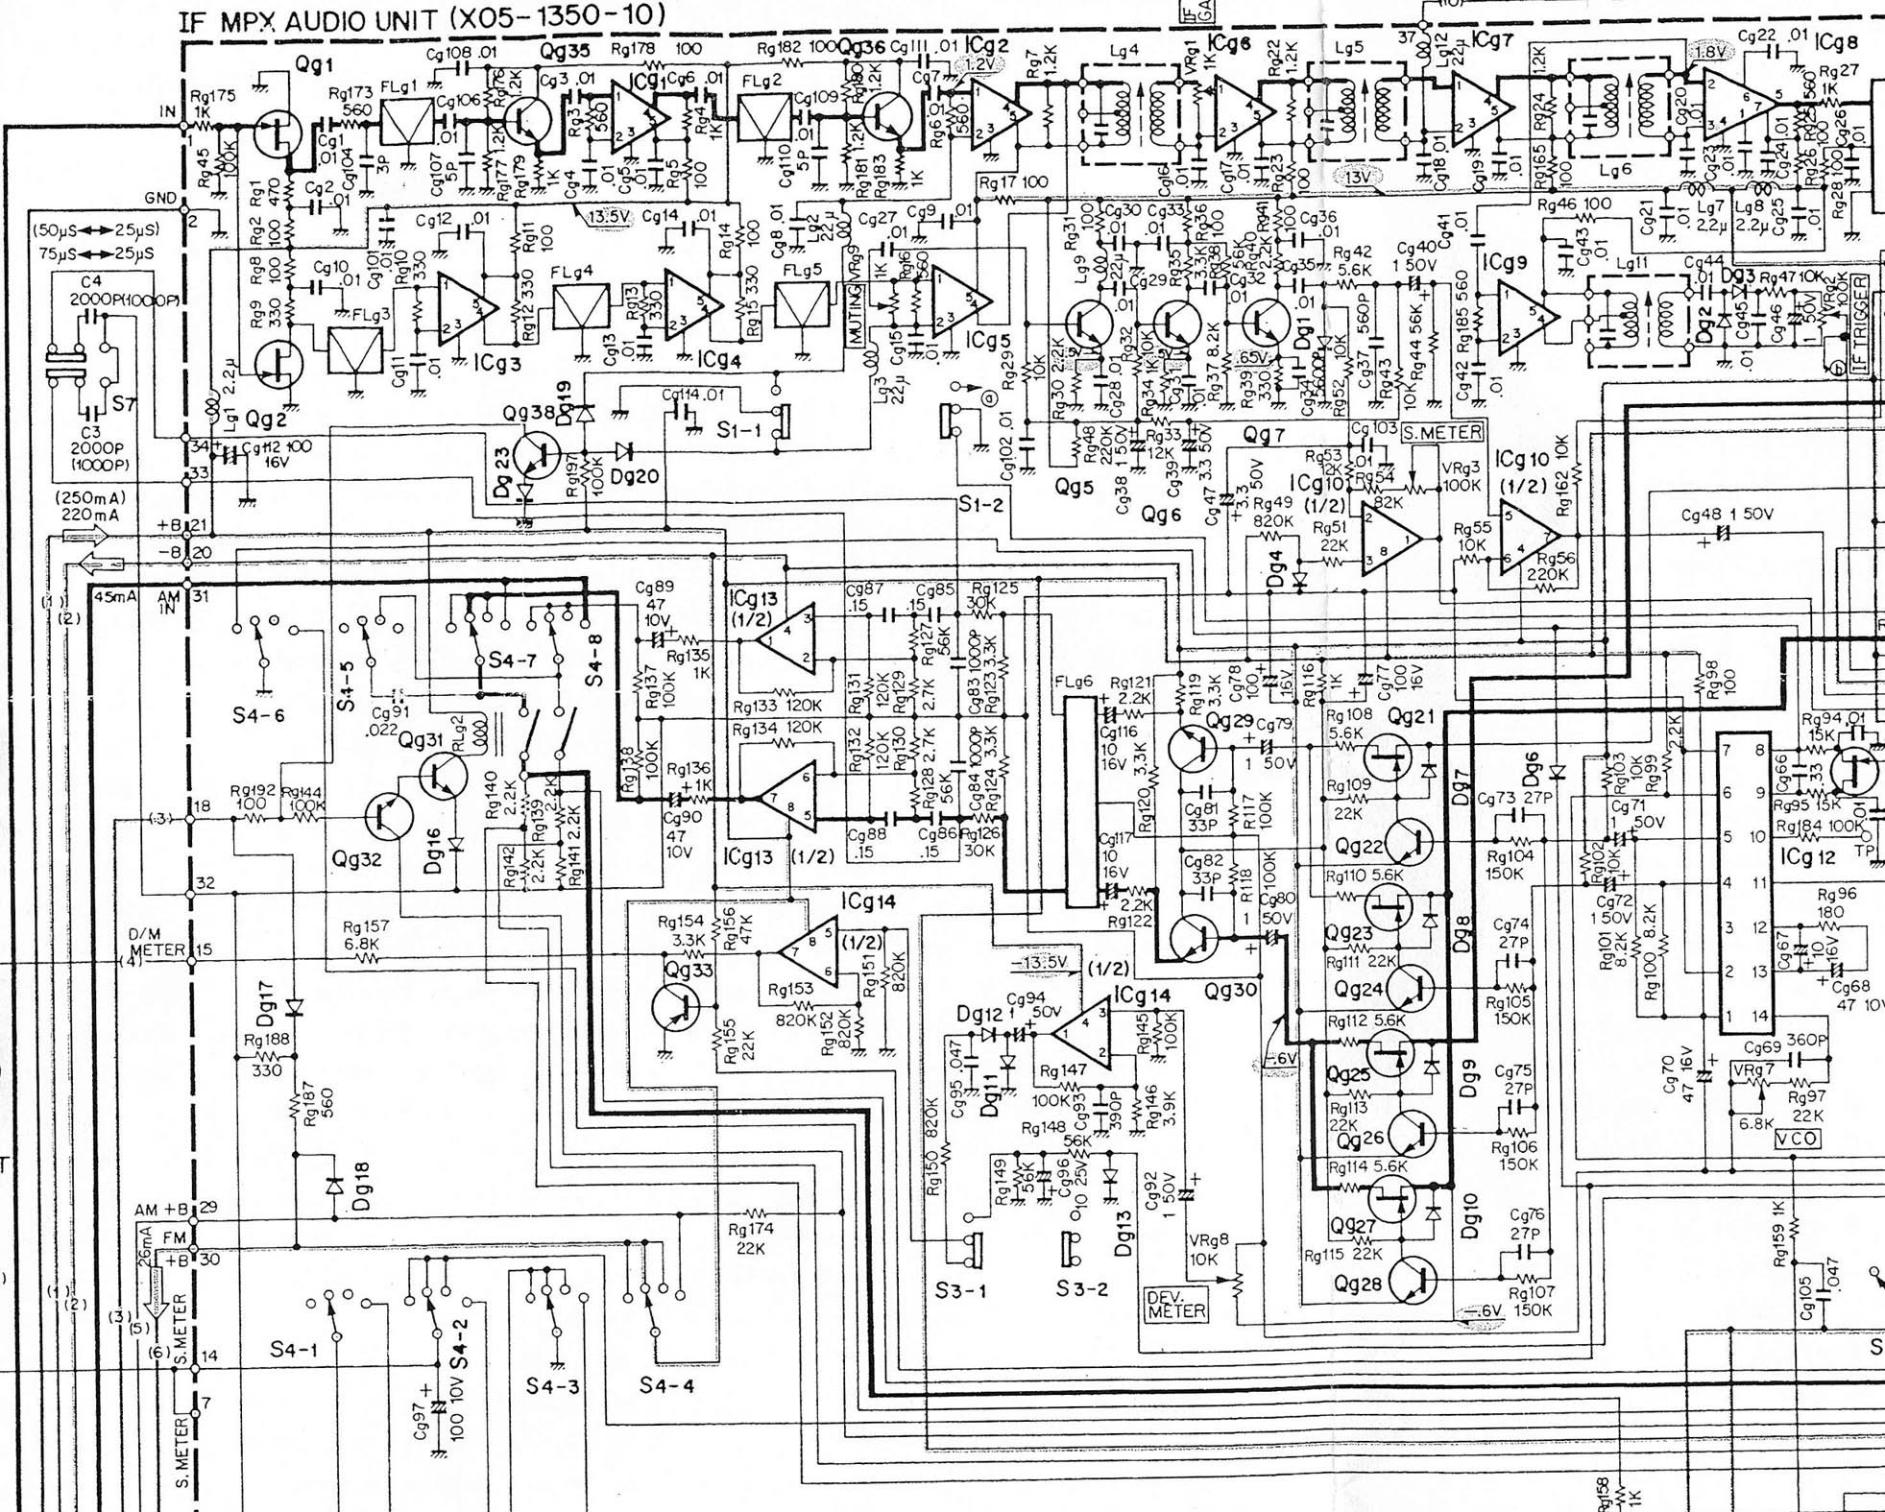

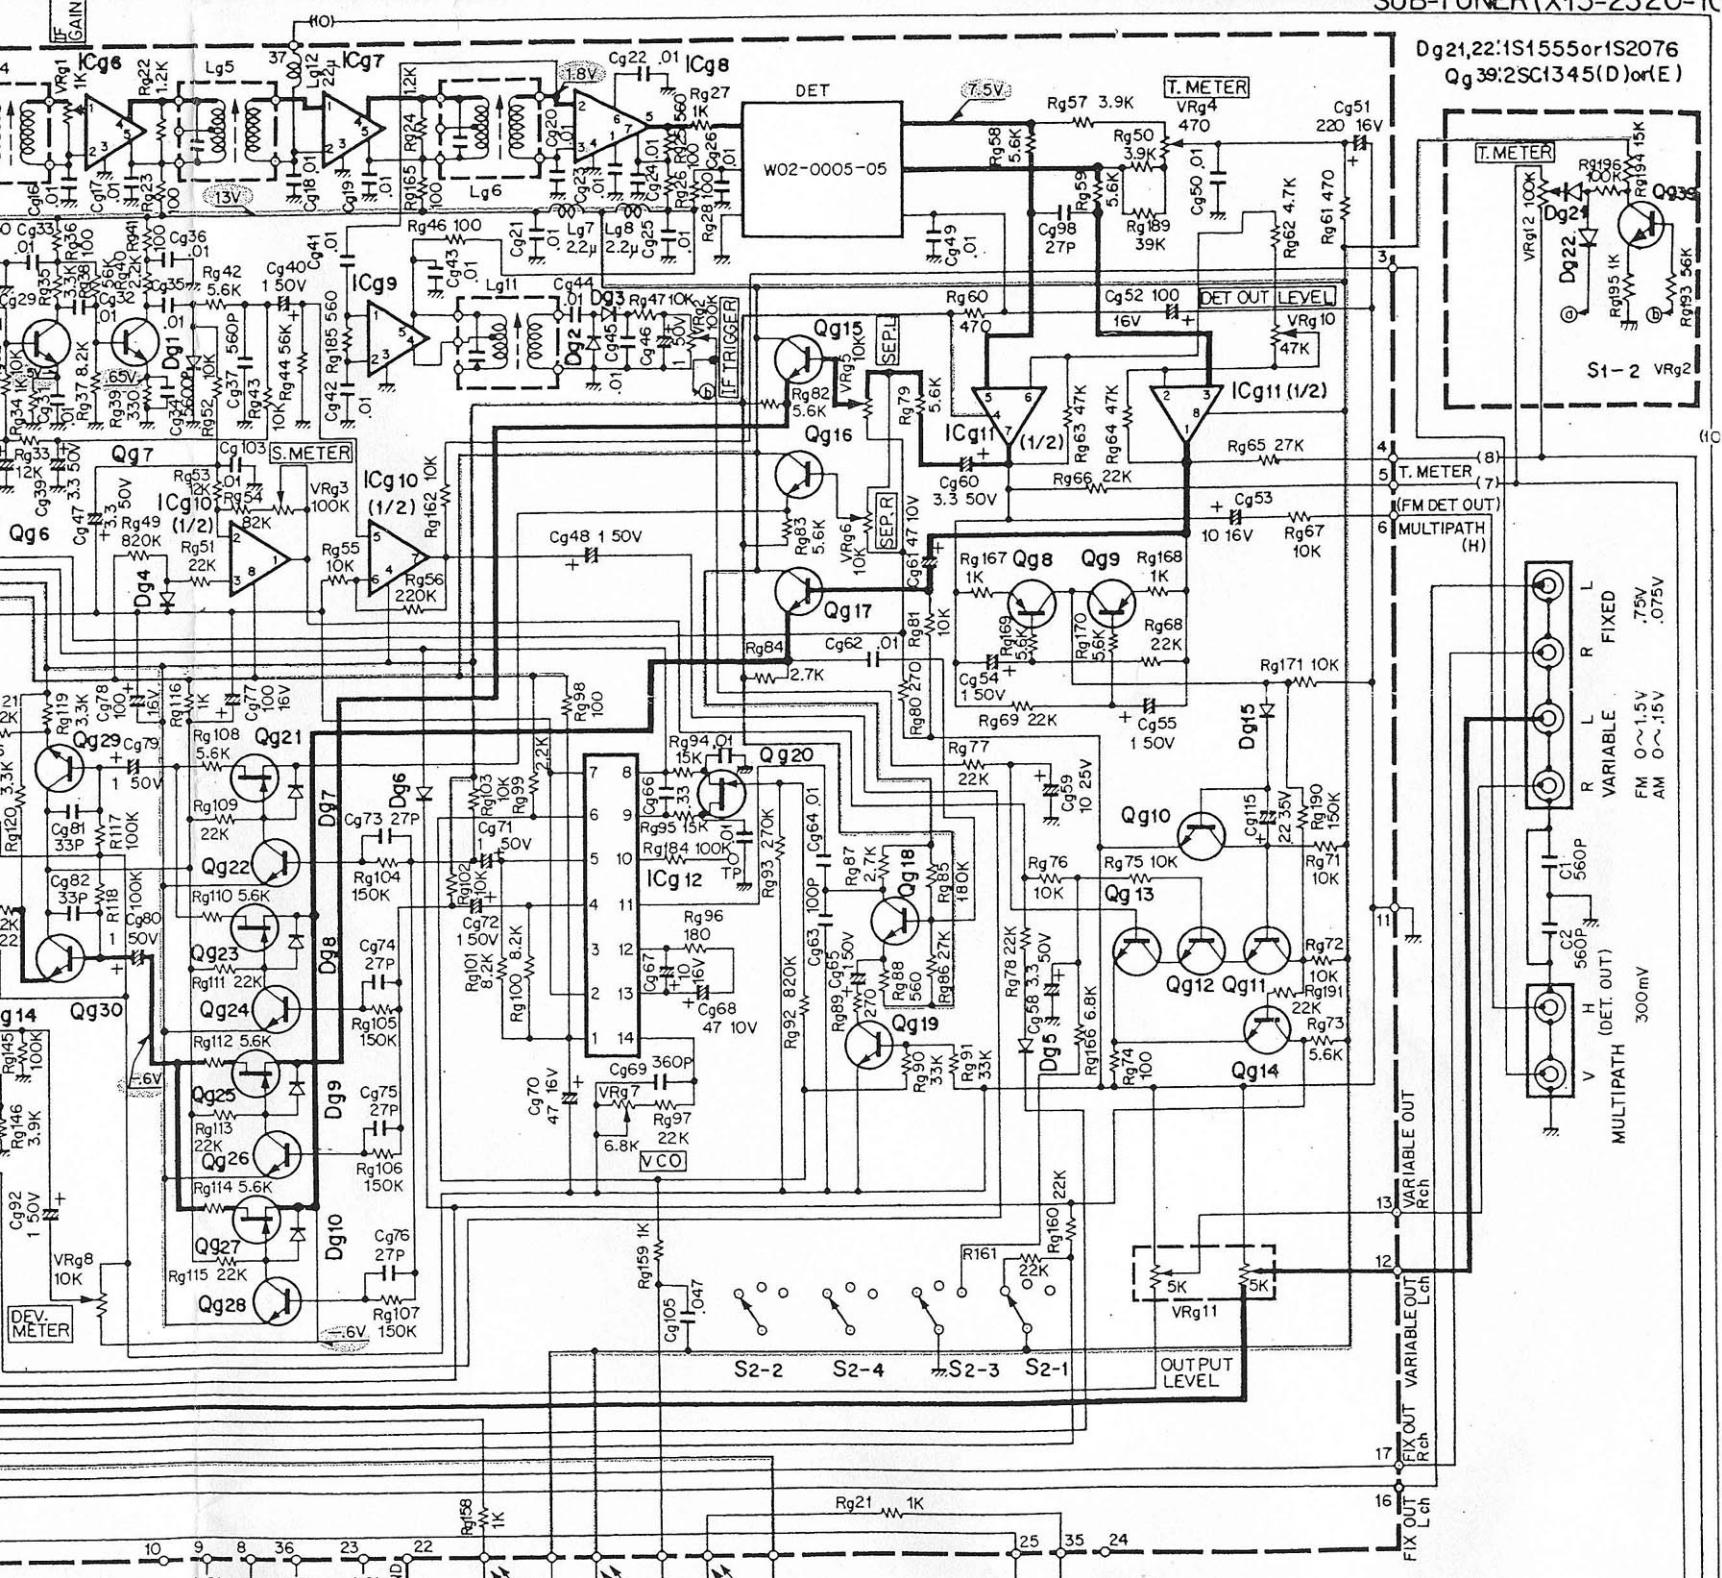

1mV (75KHz DEV.)

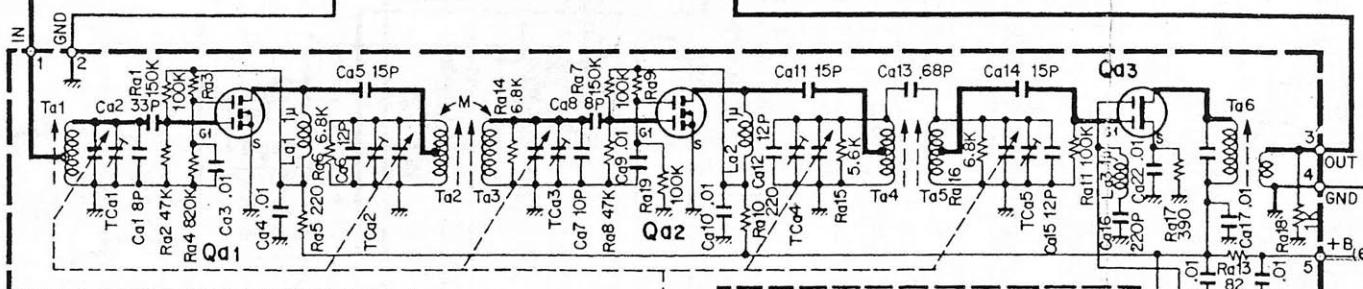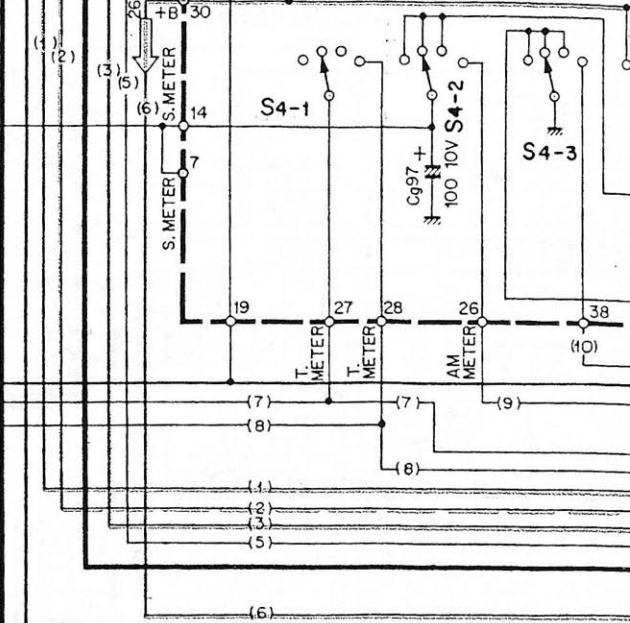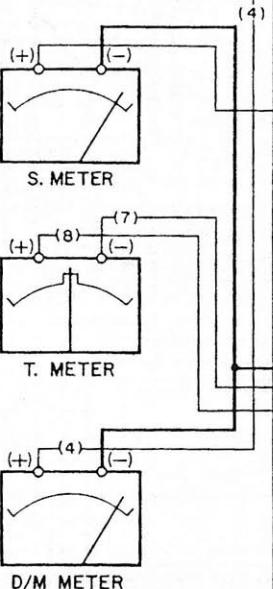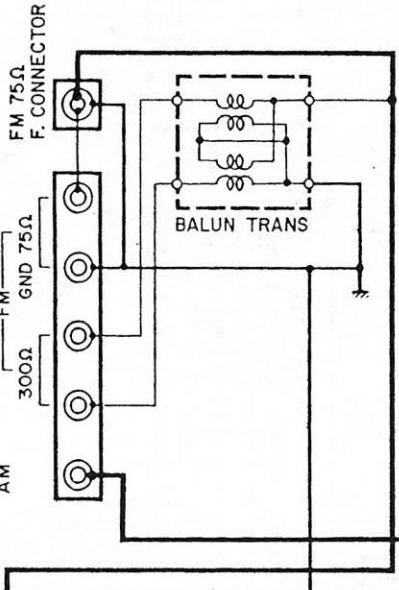

Qd1,2 SD306
Qd3.3SK49 (R)

RF UNIT
(X01-1220-10)

